

Incorporating Reliability Performance Measures into the Transportation Planning and Programming Processes

Case Study Technical Memorandum

prepared for

Strategic Highway Research Program

authors

Cambridge Systematics, Inc.

date

March 2013

ACKNOWLEDGMENT OF SPONSORSHIP

This work was sponsored by Federal Highway Administration in cooperation with the American Association of State Highway and Transportation Officials, and it was conducted in the Strategic Highway Research Program, which is administered by the Transportation Research Board of the National Academies.

DISCLAIMER

This is an uncorrected draft as submitted by the research agency. The opinions and conclusions expressed or implied in the report are those of the research agency. They are not necessarily those of the Transportation Research Board, the National Academies, or the program sponsors.

Incorporating Reliability Performance Measures into the Transportation Planning and Programming Processes

Case Study Technical Memorandum

prepared for

Strategic Highway Research Program

authors

Cambridge Systematics, Inc.

date

March 2013

A. Knoxville Region Transportation Planning Organization

A.1 OBJECTIVE

The primary objective of the case study is to develop a process for estimating reliability performance measures and identifying reliability deficiencies based on traffic flow and incident duration data, and estimating the impacts of operations projects for the Knoxville Regional Transportation Planning Organization (TPO). The TPO has begun to carry out the update of the Long-Range Transportation Plan (LRTP) for the region and is undertaking Planning for Operations. This case study documents the incorporation of reliability into the agency's transportation planning process.

The case study also provides validation for the following steps in the Reference Guide:

- Measuring and Tracking Reliability;
- Incorporating Reliability in Policy Statements; and
- Incorporating Reliability Measures into Program and Project Investment Decisions.

A.2 BACKGROUND

The Knoxville area TPO covers an area that includes all of Knox County and urbanized portions of Blount County, Loudon County and Sevier County. The area has a population of more than 500,000. This area is known as the TPO Planning Area. It should be pointed out that for certain planning activities, such as air quality planning, the area of interest is larger and covers portions of a few other counties such as Anderson County, Roane County and Jefferson County.

The Knoxville Regional TPO has begun the update process of its long-range transportation plan (LRP) and is developing an ongoing Planning for Operations process, which includes a project to update the ITS Architecture for the region. The road network of the region includes two major Interstate highways (I-40 and I-75), which overlap with each other for a stretch of approximately 17 miles through Knoxville. I-40 carries a large amount of truck traffic, and the traffic volume along the overlapped stretch of I-40 and I-75 exceeds 180,000 vehicles per day on a few segments. There are also a few other Interstate Highways that serve the area: I-640, I-275, and I-140 are located within the urbanized area, and I-81 is located east of the region.

Travel time reliability is a problem along these freeways although the problem may not be as severe as in very large metropolitan areas such as Atlanta and Los Angeles. The freeways in the Knoxville area have had several major reconstruction projects, and travel time reliability has been a serious issue with travelers during those construction periods. Tennessee Department of Transportation (TDOT) works closely with Knoxville TPO, and it established a Traffic Management Center located in its Regional office in Knoxville to monitor traffic flow along the freeways using Closed Circuit Television (CCTV). TDOT also implemented the “HELP” program for incident management on the freeways in the metropolitan area. HELP trucks patrol the Interstate highways and provide assistance to motorists having problems with their vehicles. Drivers of HELP trucks also help clear travel lanes at incident sites, which may be blocked due to crashes, debris and other causes. This program helps reduce delay of motorists caused by incidents and thus improve travel time reliability. TDOT collects travel time data on the freeways using ITS technology. Knoxville area’s transportation system and organizations provide ample opportunities for giving more priority to travel time data collection and implementation of strategies to improve travel time reliability.

A.3 MEASURING AND TRACKING RELIABILITY

Knoxville TPO is interested in establishing a performance monitoring system for measuring and tracking reliability on selected sections of freeways on a continuing basis. To establish an initial framework for the system, the case study demonstrates the methodology for analyzing travel time data and calculating various reliability performance indices based on ITS traffic flow and incident data from Knoxville’s freeway management system.

Select Reliability Performance Measures

Knoxville area TPO currently uses a limited number of performance measures based primarily on traffic volume and capacity of roadway segments and level of service. In their CMP, the Knoxville TPO measures the Planning Time Index (PTI) as its primary reliability metric for freeways in the region and plans to narrow the time period to a ‘specific time period of the day.’ (Note: the calculation of reliability metrics is limited to those freeway sections covered by ITS detectors.) In addition, the TPO has developed an incident management specific measure to support the overall reliability statistic: clearance time of traffic incidents on freeways and major arterials in the region. This case study focuses on calculation of Travel Time Index, Planning Time Index, and incident-related delay.

Collect Data

TPO planners are interested in using more performance measures in the planning process, but their ability has been limited in the past due to the lack of data. TDOT’s freeway surveillance system allows for point detection of traffic volume and speed data on the freeways using ITS technology, and the ITS related data collection program is expected to provide more data on

various travel characteristics including travel time fluctuations. As part of the case study, detailed volume and speed data were obtained from TDOT's archived ITS data system to support the assessment of travel time reliability along freeway segments.

To identify incident prone locations (i.e., reliability deficiencies) on freeways, Knoxville TPO also obtained incident data from the Region 1 office of TDOT for the three month period of January through March 2011. A sample incident record appears in Figure A-1.

Figure A.1 Example Incident Record from the Knoxville Traffic Management Center

Incident ID:4022 For Multivehicle Crash - I-40 Eastbound Milepost 382			
Timestamp	Event Type	Event Data	Operator
1/3/2011 7:50:20 AM	Opened	Multivehicle Crash	Hawes
1/3/2011 7:50:20 AM	Added Vehicle	TT TN	Hawes
1/3/2011 7:50:21 AM	Enroute	Unit 7103	Carr
1/3/2011 7:50:52 AM	Lane Update	5 Lanes-Lane(s) 5/RS Closed/Q: 1 mi	Hawes
1/3/2011 7:51:14 AM	CMT:CCTV	11	Carr
1/3/2011 7:51:25 AM	Confirmation	TMC	Carr
1/3/2011 7:52:07 AM	Agcy Arrived	RM Ambl	Hawes
1/3/2011 7:52:23 AM	DMS 2 Activated	RIGHT LANE BLOCKED BEFORE PAPERMILL DR MERGE LEFT	Hawes
1/3/2011 7:52:39 AM	DMS 1 Activated	RIGHT LANE BLOCKED AT PAPERMILL DR 9 MILES	Hawes
1/3/2011 7:52:51 AM	DMS 15 Activated	TRAVEL TIME TO 40E WEST HILLS 7-9 MIN DOWNTOWN 14-	Hawes
1/3/2011 7:53:08 AM	DMS 16 Activated	TRAVEL TIME TO 40E WEST HILLS 7-9 MIN DOWNTOWN 14-	Hawes
1/3/2011 7:53:56 AM	Aux Data	TRAVEL TIME TO 40E WEST HILLS 7-9 MIN DOWNTOWN 14-Add TSIS	Hawes
1/3/2011 7:55:20 AM	Arrived	Unit 7103	Carr
1/3/2011 7:56:07 AM	HAR 1 Activated	SCRIPTED MESSAGE	Hawes
1/3/2011 7:57:02 AM	HAR 2 Activated	SCRIPTED MESSAGE	Hawes
1/3/2011 7:57:15 AM	HAR 3 Activated	SCRIPTED MESSAGE	Hawes
1/3/2011 7:57:29 AM	HAR 4 Activated	SCRIPTED MESSAGE	Hawes
1/3/2011 8:01:01 AM	CMT:General	BEACONS 3 7 12 ACTIVATED	Hawes
1/3/2011 8:03:08 AM	Arrived	Unit 7112	Carr
1/3/2011 8:08:00 AM	Departure	Unit 7112	Carr
1/3/2011 8:08:08 AM	Activity	Blocked Ln/Traf Ctrl	Carr
1/3/2011 8:10:22 AM	DMS 2 Activated	MOVE OVER OR SLOWDOWN FOR EMERGENCY VEHICLES	Hawes
1/3/2011 8:11:23 AM	DMS 1 Activated	BLOCKED LANE CLEARING AT PAPERMILL DR 9 MILES	Hawes
1/3/2011 8:12:10 AM	DMS 15 Activated	BLOCKED LANE CLEARING 40E AT PAPERMILL DR EXPECT D	Hawes
1/3/2011 8:12:54 AM	DMS 16 Activated	BLOCKED LANE CLEARING 40E AT PAPERMILL DR EXPECT D	Hawes
1/3/2011 8:16:42 AM	Departure	Unit 7103	Carr
1/3/2011 8:17:03 AM	Activity	Remove Debris	Carr
1/3/2011 8:17:03 AM	Activity	Blocked Ln/Traf Ctrl	Carr
1/3/2011 8:18:27 AM	HAR 1 Deactivate		Jolly
1/3/2011 8:18:48 AM	Aux Data	Queue Clr	Hawes
1/3/2011 8:18:54 AM	HAR 2 Deactivate		Jolly
1/3/2011 8:19:01 AM	HAR 3 Deactivate		Jolly
1/3/2011 8:19:08 AM	HAR 4 Deactivate		Jolly
1/3/2011 8:19:10 AM	DMS 1/15/16 Deactivate	BLOCKED LANE CLEARING 40E AT PAPERMILL DR EXPECT D	Hawes
1/3/2011 8:19:37 AM	HAR All Deactivate		Hawes
1/3/2011 8:19:54 AM	Aux Data	Rmv TSIS	Hawes
1/3/2011 8:20:31 AM	Lane Update	5 Lanes-Lane(s) RS Closed/Q: 0 mi	Hawes
1/3/2011 8:21:02 AM	CMT:General	BEACONS DEACTIVATED	Hawes
1/3/2011 8:28:26 AM	Agcy Arrived	Tow 1	King
1/3/2011 8:37:13 AM	Lane Update	All Lanes Open	King
1/3/2011 8:37:34 AM	Closed	Closed	King

Modified/Deleted Entries				
Orig. Timestamp	Change Timestamp	Event Type	Event Data	Supv
1/3/2011 7:50:21 AM	1/3/2011 7:58:44 AM	Opened	Multivehicle Crash	Hawes
1/3/2011 7:50:52 AM	1/3/2011 8:03:17 AM	Lane Update	5 Lanes-Lane(s) 5 Closed	Hawes
1/3/2011 7:50:52 AM	1/3/2011 8:03:45 AM	Lane Update	5 Lanes-Lane(s) 5/RS Closed	Hawes
1/3/2011 7:52:07 AM	1/3/2011 7:52:07 AM	Agcy Arrived	RM Ambl	Carr
1/3/2011 7:56:07 AM	1/1/1900	HAR 1 Activated	sCRIPTEd mESSAGE	Hawes
1/3/2011 7:59:20 AM	1/3/2011 8:00:04 AM	Added Vehicle	Tag:	Hawes
1/3/2011 8:11:23 AM	1/3/2011 8:13:57 AM	DMS 2 Activated	BLOCKED LANE CLEARING BEFORE PAPERMILL DR MERGE	Hawes
1/3/2011 8:11:23 AM	1/3/2011 8:14:26 AM	DMS 2 Activated	MOVE OVER OR SLOW DOWN FOR EMERGENCY VEHICLES	Hawes


Estimate Reliability Performance

Average travel time and travel time indices were calculated using operations data from the archived data system maintained by TDOT. The calculation procedures to transform field data into travel time-based metrics are the same ones used in SHRP 2 Project L03. The first step in this process was to define highway sections over which travel time statistics would be calculated. The data covered all freeways in the Knoxville metropolitan area for a total mileage of 46 miles. The analysis was done separately for each direction of respective freeways, and thus the directional mileage covered is 92 miles. The following principles were used in defining sections:

- Sections should be relatively homogenous in terms of traffic and geometric conditions. Multiple interchanges are allowed as long as they don't provide for major drops or additions in traffic volumes along the section.
- Sections should represent portions of trips taken by travelers. Typical distances for urban freeway sections are 3-6 miles in length.
- Major bottlenecks, defined as major freeway-to-freeway interchanges, can be present at the downstream end of the section, but never in mid-section.

A total of 18 segments were identified in each direction for a total of 36 segments; the average length of each segment was approximately 2.6 miles. The point measurements of volume and speed were converted to travel times over fixed highway distances using a method in widespread use by researchers and practitioners: it is assumed that the point speed measures the travel time over a distance half the distance to the nearest upstream and downstream detectors. This assumption works well if detector spacing is close: ½ mile spacing or less. Figure A-2 shows the process for computing section travel times from individual detectors; this was done at a 5-minute time level.

Figure A-2 Converting Spot Speeds to Section Travel Times

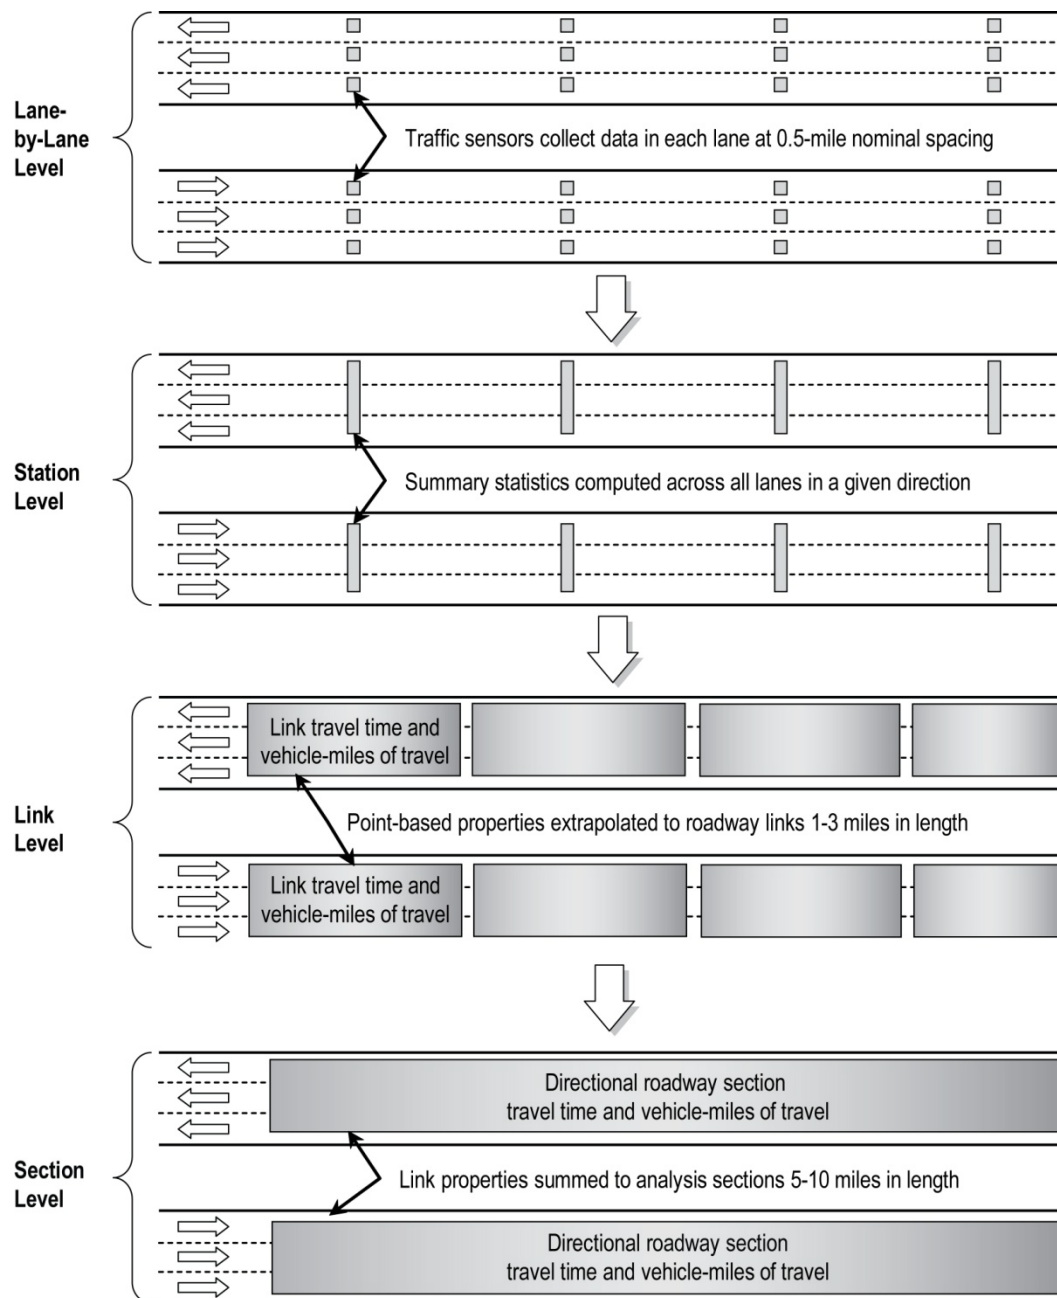

For each detector “zone”, vehicle-miles of travel (VMT) and vehicle-hours of travel were computed:

$$\text{VMT} = \text{VOLUME} * \text{DetectorZoneLength}$$

$$\text{VHT} = \text{VMT} / (\text{Min}(\text{FreeFlowSpeed}, \text{Speed}))$$

When aggregating to the section level, at least half of the detectors had to report valid data for each of the 5-minute periods; otherwise the data was set to “missing”. In the case where less than half of the detector data was missing, VMT and VHT were factored up based on the ratio of total section length to the sum of the lengths of the individual detector zones.

For every 5-minute time period in the year, total VMT and VHT were computed. From these, key performance measures were computed:

$$\begin{aligned} \text{SpaceMeanSpeed} &= \text{VMT/VHT} \\ \text{TravelRate} &= 1/\text{SpaceMeanSpeed} \\ \text{TTI} &= \text{MAX}(1.0, (\text{TravelRate}/(1/\text{FreeFlowSpeed}))) \end{aligned}$$

Because the bases for the measures are total VMT and VHT, the process is self-weighting. For urban freeways, FreeFlowSpeed is fixed at 60 mph. Note that the TTI was not allowed to be lower than 1.0, i.e., speeds higher than 60 mph were set to 60 mph. The reason for this is that the TPO is interested in measuring congestion, not high speeds. If speeds were not capped, the resulting statistics would be biased because of the “credit” given to high speeds. However, the original data was preserved for future examinations.

The congestion metrics were computed for each 5-minute period in a day over the course of a year. For any given analysis time slice (e.g., peak hour, peak period), a TTI distribution and its moments (e.g., 95th percentile TTI) was computed as the VMT-weighted average of all the 5-minute TTIs in that time slice for the entire year. These indices were developed for the AM and PM peak hours and also for the peak hour shoulders. Table A-1 shows the results for the time period from March 1 to December 31, 2011. These data will serve as the basis for an ongoing annual freeway performance report that the TPO plans to develop. The data will also be used in the modeling portion of the LRTP Update.

Table A-1 Archived Data Analysis Results

Route	Dir	Section	Peak Period	Average Travel Time	Average Travel Time Index (TTI)	TTI (80 th Percentile)	TTI (90 th Percentile)	TTI (95 th Percentile)	TTI (99 th Percentile)
I-140	EB	George Williams Road to Kingston Pike	AM PEAK	1.303	1.002	1.000	1.000	1.008	1.032
I-140	EB	George Williams Road to Kingston Pike	PM PEAK	1.339	1.030	1.000	1.000	1.014	1.664
I-140	WB	George Williams Road to Kingston Pike	AM PEAK	1.456	1.079	1.049	1.222	1.543	2.115
I-140	WB	George Williams Road to Kingston Pike	PM PEAK	1.358	1.006	1.003	1.011	1.027	1.127
I-140	EB	Kingston Pike to Dutchtown Road	AM PEAK	1.693	1.092	1.156	1.253	1.331	1.514
I-140	EB	Kingston Pike to Dutchtown Road	PM PEAK	1.623	1.047	1.043	1.061	1.104	1.480
I-140	WB	Kingston Pike to Dutchtown Road	AM PEAK	1.550	1.069	1.098	1.204	1.307	1.456
I-140	WB	Kingston Pike to Dutchtown Road	PM PEAK	1.509	1.041	1.037	1.050	1.082	1.213
I-275	NB	I-40 to Woodland Avenue	AM PEAK	1.198	1.042	1.037	1.059	1.130	1.383
I-275	NB	I-40 to Woodland Avenue	PM PEAK	1.209	1.051	1.060	1.080	1.138	1.258
I-275	SB	I-40 to Woodland Avenue	AM PEAK	1.210	1.053	1.048	1.066	1.109	1.327
I-275	SB	I-40 to Woodland Avenue	PM PEAK	1.193	1.037	1.045	1.070	1.104	1.210
I-275	NB	Woodland Avenue to I-640	AM PEAK	1.610	1.039	1.044	1.066	1.112	1.208
I-275	NB	Woodland Avenue to I-640	PM PEAK	1.654	1.067	1.065	1.110	1.197	1.441
I-275	SB	Woodland Avenue to I-640	AM PEAK	1.868	1.067	1.074	1.089	1.125	1.207
I-275	SB	Woodland Avenue to I-640	PM PEAK	1.923	1.099	1.116	1.140	1.169	1.274
I-40 East Section	EB	I-275 to Cherry Street	AM PEAK	2.851	1.037	1.049	1.059	1.071	1.110
I-40 East Section	EB	I-275 to Cherry Street	PM PEAK	2.939	1.069	1.063	1.098	1.246	1.808
I-40 East Section	WB	I-275 to Cherry Street	AM PEAK	2.786	1.032	1.009	1.092	1.237	1.527
I-40 East Section	WB	I-275 to Cherry Street	PM PEAK	2.815	1.043	1.003	1.016	1.373	1.869
I-40 East Section	EB	Cherry Street to I-640 E	AM PEAK	2.422	1.031	1.042	1.053	1.066	1.128
I-40 East Section	EB	Cherry Street to I-640 E	PM PEAK	2.403	1.023	1.016	1.039	1.070	1.269
I-40 East Section	WB	Cherry Street to I-640 E	AM PEAK	2.522	1.030	1.033	1.042	1.066	1.156
I-40 East Section	WB	Cherry Street to I-640 E	PM PEAK	2.505	1.022	1.027	1.034	1.050	1.150
I-40 East Section	EB	I-640 E to Asheville Hwy	AM PEAK	1.978	1.069	1.084	1.103	1.126	1.177
I-40 East Section	EB	I-640 E to Asheville Hwy	PM PEAK	1.978	1.069	1.063	1.086	1.142	1.556
I-40 East Section	WB	I-640 E to Asheville Hwy	AM PEAK	2.044	1.022	1.028	1.033	1.042	1.090
I-40 East Section	WB	I-640 E to Asheville Hwy	PM PEAK	2.055	1.028	1.031	1.038	1.049	1.103
I-75	NB	I-640 to Murray Drive	AM PEAK	1.699	1.062	1.071	1.077	1.082	1.092
I-75	NB	I-640 to Murray Drive	PM PEAK	1.780	1.112	1.100	1.128	1.188	2.031
I-75	SB	I-640 to Murray Drive	AM PEAK	1.804	1.203	1.224	1.467	1.826	2.781
I-75	SB	I-640 to Murray Drive	PM PEAK	1.590	1.060	1.064	1.080	1.105	1.288
I-640	EB	I-40 W to Western Avenue	AM PEAK	1.003	1.003	1.001	1.005	1.013	1.042
I-640	EB	I-40 W to Western Avenue	PM PEAK	1.020	1.020	1.001	1.011	1.067	1.601

Route	Dir	Section	Peak Period	Average Travel Time	Average Travel Time Index (TTI)	TTI (80 th Percentile)	TTI (90 th Percentile)	TTI (95 th Percentile)	TTI (99 th Percentile)
I-640	WB	I-40 W to Western Avenue	AM PEAK	0.642	1.168	1.172	1.374	1.785	2.567
I-640	WB	I-40 W to Western Avenue	PM PEAK	0.559	1.017	1.014	1.041	1.083	1.240
I-640	EB	Western Avenue to I-275/I-75	AM PEAK	1.480	1.021	1.027	1.041	1.060	1.112
I-640	EB	Western Avenue to I-275/I-75	PM PEAK	1.658	1.143	1.114	1.439	1.769	2.727
I-640	WB	Western Avenue to I-275/I-75	AM PEAK	2.074	1.037	1.019	1.055	1.153	1.572
I-640	WB	Western Avenue to I-275/I-75	PM PEAK	2.021	1.010	1.012	1.016	1.024	1.102
I-640	EB	I-275/I-75 to Broadway	AM PEAK	3.244	1.014	1.016	1.020	1.032	1.068
I-640	EB	I-275/I-75 to Broadway	PM PEAK	3.317	1.037	1.046	1.067	1.113	1.288
I-640	WB	I-275/I-75 to Broadway	AM PEAK	3.135	1.011	1.015	1.020	1.026	1.044
I-640	WB	I-275/I-75 to Broadway	PM PEAK	3.168	1.022	1.023	1.031	1.052	1.145
I-640	EB	Broadway to I-40 E	AM PEAK	3.852	1.027	1.036	1.042	1.052	1.097
I-640	EB	Broadway to I-40 E	PM PEAK	3.832	1.022	1.022	1.032	1.054	1.166
I-640	WB	Broadway to I-40 E	AM PEAK	3.822	1.019	1.024	1.034	1.053	1.073
I-640	WB	Broadway to I-40 E	PM PEAK	3.833	1.022	1.026	1.042	1.070	1.123
I-40 West Section	EB	Lovell Road to Cedar Bluff Road	AM PEAK	4.206	1.026	1.027	1.036	1.061	1.151
I-40 West Section	EB	Lovell Road to Cedar Bluff Road	PM PEAK	4.453	1.086	1.058	1.191	1.390	2.228
I-40 West Section	WB	Lovell Road to Cedar Bluff Road	AM PEAK	4.540	1.020	1.024	1.033	1.056	1.103
I-40 West Section	WB	Lovell Road to Cedar Bluff Road	PM PEAK	5.315	1.194	1.335	1.585	1.756	2.373
I-40 West Section	EB	Cedar Bluff Road to West Hills (Buckingham Road)	AM PEAK	2.907	1.020	1.020	1.028	1.043	1.232
I-40 West Section	EB	Cedar Bluff Road to West Hills (Buckingham Road)	PM PEAK	3.172	1.113	1.155	1.301	1.495	2.226
I-40 West Section	WB	Cedar Bluff Road to West Hills (Buckingham Road)	AM PEAK	2.720	1.046	1.058	1.077	1.104	1.216
I-40 West Section	WB	Cedar Bluff Road to West Hills (Buckingham Road)	PM PEAK	2.790	1.073	1.051	1.097	1.301	2.001
I-40 West Section	EB	West Hills to I-640 W	AM PEAK	4.236	1.021	1.019	1.036	1.077	1.216
I-40 West Section	EB	West Hills to I-640 W	PM PEAK	4.407	1.062	1.055	1.123	1.242	1.724
I-40 West Section	WB	West Hills to I-640 W	AM PEAK	4.257	1.106	1.126	1.148	1.177	1.319
I-40 West Section	WB	West Hills to I-640 W	PM PEAK	4.301	1.117	1.127	1.183	1.295	1.868
I-40 West Section	WB	I-640 W to I-275	AM PEAK	4.592	1.044	1.055	1.070	1.092	1.168
I-40 West Section	WB	I-640 W to I-275	PM PEAK	5.532	1.257	1.510	1.681	1.799	2.147
US-129	NB	Cherokee Trail to Sutherland Avenue	AM PEAK	2.608	1.134	1.160	1.217	1.277	1.378
US-129	NB	Cherokee Trail to Sutherland Avenue	PM PEAK	2.633	1.145	1.171	1.193	1.230	1.379
US-129	SB	Cherokee Trail to Sutherland Avenue	AM PEAK	2.285	1.088	1.101	1.126	1.173	1.291
US-129	SB	Cherokee Trail to Sutherland Avenue	PM PEAK	2.351	1.119	1.089	1.147	1.219	3.207

Estimate Incident-Related Delay

The incident data were used to estimate incident-related delay. Seven different types of incidents were included in the incident data: single vehicle crash, multi-vehicle crash, debris, disabled vehicle, abandoned vehicle, police/ambulance/fire activity, and overturned vehicle. Of these, only three types were considered to cause lane blockage and delay to traffic and were subsequently included in our analysis: single vehicle crash, multi-vehicle crash, debris. The other types of incidents typically occur on shoulders of roadways and do not cause lane blockage and traffic delay.

Whereas travel time reliability indices such as the Planning Time Index are based on travel times during normal (incident free) as well as abnormal (incident affected) travel conditions, the incident data reflected only abnormal situations. Therefore, it was not possible to calculate any indicators based on the incident data that would be equivalent and comparable to Planning Time Index. However, to see if the incident data could differentiate between various stretches of freeways from the perspective of incidents and their impact on travel time, 'total duration (in minutes) of incidents per mile' was calculated for each segment of freeway.

The results helped identify a few segments that had relatively high incident duration (i.e., reliability deficiencies). Five segments were identified as problematic locations with a duration that exceeded "the average plus one standard deviation." Of these, two segments had duration more than "the average plus two times the standard deviation." Results for each segment are presented in Table A-2. The sections used are relatively short, which means the sample sizes are probably too low to draw definitive conclusions about the incident performance of the sections. In the future, sections will likely be aggregated to avoid this problem.

Table A-2 Summary Results of Incident Duration (Minutes) per mile for the Three Month Period (January – March, 2011) for Incidents (SV Crash, MV Crash, and Debris Combined)

Freeway	Segment	Total Duration of Incidents per Mile (Minutes)
I-40 West Eastbound	1. 374 to 377: Lovell (1/2 mile west) to Cedar Bluff (1/2 mile west)	107.50
	2. 378 to 380: Cedar Bluff (1/2 mile west) to West Hills (1/2 mile west)	345.33 *
	3. 381 to 384: West Hills (1/2 mile west) to I-640 W (1/2 mile west)	402.5 **
	4. 385 to 387: I-640 W (1/2mile west) to I-275 (1/2 mile west)	139.33
I-40 West Westbound	1. 374 to 377: Lovell (½ mile west) to Cedar Bluff (1/2 mile west)	159.9
	2. 378 to 380: Cedar Bluff (1/2 mile west) to West Hills (1/2 mile west)	201.0
	3. 381 to 384: West Hills (1/2 mile west) to I-640 W (1/2 mile west)	139.75
	4. 385 to 387: I-640 W (1/2mile west) to I-275 (1/2 mile west)	259.33
I-40 East Eastbound	1. 388 to 389: I-275 (1/2 mile west) to Cherry Street (1/2 mile west)	268
	2. 390 to 392: Cherry Street (1/2 mile west) to I-640 E (1/2 mile west)	51
	3. 393 to 394: I-640 E (1/2 mile west) to Asheville Hwy (1/2 mile east)	217.5

Freeway	Segment	Total Duration of Incidents per Mile (Minutes)
I-40 East Westbound	1. 388 to 389: I-275 (1/2 mile west) to Cherry Street (1/2 mile west) 2. 390 to 392: Cherry Street (1/2 mile west) to I-640 E (1/2 mile west) 3. 393 to 394: I-640 E (1/2 mile west) to Asheville Hwy (1/2 mile east)	240 52 77
I-275 Northbound	1. 0 to 1: I-40 to Woodland Avenue 2. 2 to 3: Woodland Avenue to I-640	303.33 * 255.5
I-275 Southbound	1. 0 to 1: I-40 to Woodland Avenue 2. 2 to 3: Woodland Avenue to I-640	116.67 114.5
I-640 Eastbound	1. 0 to 1: I-40 W to Western Avenue 2. 2 to 3: Western Avenue to I-275/I-75 3. 4 to 6: I-275/I-75 to Broadway 4. 7 to 10: Broadway to I-40 E	116.67 379.5 * 75 23.5
I-640 Westbound	1. 0 to 1: I-40 W to Western Avenue 2. 2 to 3: Western Avenue to I-275/I-75 3. 4 to 6: I-275/I-75 to Broadway 4. 7 to 10: Broadway to I-40 E	494.67 ** 162 129.33 119.5
I – 75 Northbound	1. 108 to 110: North of I 640) to Callahan Dr.	115.67
I – 75 Southbound	1. 108 to 110: North of I 640) to Callahan Dr.	218.13
I – 140 Eastbound	0 & 1: Dutchtown to Kingston Pk 2 & 3: Kingston Pk to Westland 4 & 5: Westland to Northshore 6 to 9: Northshore to TN River	99 59 85 50
I – 140 Westbound	0 & 1: Dutchtown to Kingston Pk 2 & 3: Kingston Pk to Westland 4 & 5: Westland to Northshore 6 to 9: Northshore to TN River	151 122 29 16
Average Duration: 163.75 Standard Deviation: 114.66 Notes: * Exceeds Average + Standard Deviation (278.41) ** Exceeds Average + 2 x Standard Deviation (393.07)		

The analysis of incident duration did not account for the number of lanes that were blocked during each incident, and so it did not reflect the number of vehicles that were delayed. Knoxville TPO examined detailed incident records for a few selected segments and found that due to the way the data is coded, it would be very time consuming to extract the lane blockage information. There are a few other urban areas where lane blockage information is easily accessible. For example, an analysis of data for Atlanta freeways showed that incidents involving vehicular crashes affect 1.4 times as many lanes as incidents involving debris. So in order to incorporate the impact of travel lanes blocked due to an incident, Knoxville TPO reanalyzed the incident prone segments of the Knoxville area by weighing the duration due to crashes by 1.5 and that due to debris by 1.0. The weighted total duration per mile for these segments did not change the rankings of the segments based on duration.

Table A-3 presents the results of the incident duration/clearance time analysis and shows the average duration of incidents of different types. These results will be used as a baseline in

future work by the TPO. For example, Knoxville TPO wants to include a goal of reducing the duration (clearance time) of incidents on the freeways in its Operations Plan, and the results of the incident duration/clearance time analysis will be used to set a quantifiable objective for this goal. The goal can be accomplished by implementing improved response strategies by TDOT's incident management operation.

Table A-3 Duration/Clearance Time for Incidents by Type

Type of Incident	Average Duration (Minutes)	Median Duration (Minutes)	Standard Deviation (Minutes)
Single Vehicle Crash	62.95	35	99.15
Multi Vehicle Crash	49.38	43	35.57
Debris	13.07	7	21.02

A.4 INCORPORATING RELIABILITY IN POLICY STATEMENTS

Develop Policy Statement

Knoxville TPO has embraced the concept of linking transportation operations with transportation planning, which is being promulgated by the Federal Highway Administration. Knoxville TPO is engaged in a variety of activities that may be considered a part of its planning for operations program, and the majority of these activities are included in the Congestion Management Process (CMP). The CMP identifies operations projects and strategies, many of which are included in the Metropolitan Transportation Plan.

As a result of this case study, Knoxville TPO intends to include the improvement of travel time reliability as a specific objective in their CMP. They also intend to craft a reliability target(s) based around a "failure/on-time" reliability performance measure. As an example, the target could be stated as: "By 2020, reduce the variability in travel time on freeways and major arterials in the region such that 95% of trips along a roadway segment have travel times no more than 1.5 times the average travel time on that segment for a specific time period of the day." Further work will be required to pick the most relevant performance measure and target numbers.

A.5 INCORPORATING RELIABILITY MEASURES INTO PROGRAM AND PROJECT INVESTMENT DECISIONS

In addition to developing the initial framework for an ongoing performance monitoring system (presented above), the case study considered how reliability can be integrated into a current

planning process. In Knoxville, the update to the Regional ITS Architecture was just beginning, so it was decided to explore how reliability could be woven into it.

Develop a Project List

As part of the Knoxville Region ITS Architecture Update Study, Knoxville TPO organized a series of workshops for updating the ITS Architecture for the region. These workshops helped identify the Market/Service Packages within each program area that are important for the Knoxville area and establish priorities among these. Market packages represent different types of services that can be provided and projects that can be implemented within each program/service area. One of the products of the ITS Architecture Update study is a list of specific projects related to respective market/service packages.

The Knoxville TPO decided to estimate the reliability impacts of the operations investments identified in their Regional ITS Architecture Update. Only those projects for which quantified relationships between the investment strategy and the required inputs to the method exist (e.g., segment volume, capacity, free flow speed) were analyzed, as identified in Table A-4. The final project list was developed by consensus of Knoxville ITS Architecture and TPO stakeholders.

Table A-4 Knoxville ITS Architecture Projects Analyzed for Benefits

	Length	2034 VMT
Region 1 Incident Management Expansion - I-40 and I-75 West of Knoxville		
Segment 1 - I-40 from U.S. 321 (Exit 364) to I-40/75 Interchange (Exit 368)	3.53	200,585
Segment 2 - I-75 from U.S. 321 (Exit 81) to I-40/75 Interchange (Exit 84)	2.68	228,505
Segment 3 - I-40/75 from I-40/75 Interchange (Exit 368) to near Lovell Rd (Exit 374)	6.37	845,083
Region 1 Incident Management Expansion - US 129/SR 115 (Alcoa Hwy)		
Segment 1 - I-140 to Gov John Sevier Hwy	3.83	230,634
Segment 2 - Gov John Sevier Hwy to near Cherokee Trail	3.39	204,047
Region 1 Incident Management Expansion - I-75 North of Knoxville		
Segment 1 - near Merchant Dr (Exit 108) to Emory Rd (Exit 112)	3.59	313,708
Region 1 Incident Management Expansion - I-140 South of Knoxville		
Segment 1 - near Westland Dr (Exit 3) to US 129 (Exit 11)	8.61	608,238
TDOT Ramp Metering		
Segment 1 - I-40 from I-140 (Exit 376) to I-640 (Exit 385)	8.23	1,458,962
City of Oak Ridge Traffic Signal System Upgrades		
Segment 1 - Illinois Ave from Robertsville Rd to Tulane Ave	1.04	27,907
Segment 2 - Illinois Ave from Tulane Ave to Lafayette Dr	0.89	29,757
Segment 3 - Oak Ridge Tpk from Illinois Ave to Florida Ave	2.57	71,577
Segment 4 - Lafayette Dr from Oak Ridge Tpk to Bear Creek Rd	1.91	51,590
City of Oak Ridge DMS Deployment		

	Length	2034 VMT
Segment 1 - Solway to Illinois Ave	3.11	163,840
Cities of Maryville & Alcoa CCTV Camera Deployment		
Segment 1 - US 129 from Pellissippi Pkwy to Hunt Rd	2.19	143,460
Segment 2 - US 129 from Hunt Rd to US 411	4.17	212,503
Segment 3 - SR 35 from US 129 to US 321	2.66	73,990
City of Knoxville DMS Deployment		
Segment 1 - Kingston Pk from Northshore Dr to Pellissippi Pkwy	9.38	281,355
Combined City of Pigeon Forge & Sevierville Adaptive Signal System		
Segment 1 - SR 66 from I-40 to Chapman Hwy	8.72	362,032
Segment 2 - US 441 from Chapman Hwy to Dollywood Ln	7.35	388,252
Segment 3 - US 411 (Dolly Parton Pkwy) from SR 66 to Veterans Blvd	1.41	63,467

Select Analysis Method

Because the update to the Regional ITS Architecture was just beginning, Knoxville TPO had limited input data consisting of a project list along with segment volumes, capacities, and free flow speeds. They decided to conduct a quick order-of-magnitude assessment of the reliability impacts of projects using the sketch planning methods and the “data poor” reliability prediction equations from SHRP 2 L03. Their objective was to obtain an estimate of total delay (recurring plus nonrecurring) in order to compare congestion levels with and without the investments in place. This allows them to identify projects offering the highest benefits in terms of reliability.

To support the case study, SHRP 2 L05 produced a spreadsheet that operationalizes the data poor equations from SHRP 2 L03. The spreadsheet requires users to input capacity, volume, and length of segment and uses IDAS lookup tables in conjunction with the SHRP 2 L03 data poor equations to produce several measures of reliability, including the mean TTI, 50th percentile TTI, 80th percentile TTI, and 95th percentile TTI/PTI. It also produces a measure of overall delay that includes non-recurring delay using the relationship of the economic value of average delay to non-recurring delay.

Estimate Baseline Reliability Benefits

To establish baseline conditions, they applied a sketch planning approach using the following steps and equations from the Technical Reference to estimate reliability without the investment in place:

Compile input data for each analysis segment into a spreadsheet. Input data include directional (D) and peak hour (K) factors, segment length, free-flow speed, volume, capacity, and number of lanes, as shown in Table A-5

Compile average travel time data for each segment into the spreadsheet. For freeway segments, average travel time was calculated using the following equations from NCHRP Report 387 (for uncongested segments) and the work of Ruiter (for congested segments) (Equations 3 and 4 from the Technical Reference):

$$t = \frac{1 + 0.2x^{10}}{FFS} \text{ for } x < 1$$

$$t = \frac{1}{50 * (0.55 + (0.444x^{-3}))} \text{ for } x \geq 1$$

The equations were adapted slightly to calculate average travel time for arterial segments:

$$t = \frac{1 + 0.05x^{10}}{FFS} \text{ for } x < 1$$

$$t = \frac{1}{45 * (0.55 + (0.444x^{-3}))} \text{ for } x \geq 1$$

Compute the recurring delay in hours per mile.

$$\text{RecurringDelay} = t - (1/\text{FreeFlowSpeed})$$

Compute the delay due to incidents (*IncidentDelay*) in hours per mile. Incident delay can be obtained using basic field data (i.e., segment volumes, capacities, and number of lanes) and the lookup tables from the IDAS User Manual¹. This is the baseline incident delay (Du).

Compute the Overall Mean Travel Time Index (*TTI_m*) for the baseline condition, which includes the effects of recurring and incident delay:

$$TTI_m = 1 + FFS * (\text{RecurringDelay} + \text{IncidentDelay})$$

The *TTI_m* was used to compute the 80th and 50th percentile travel time indices (*TTI₈₀*, *TTI₅₀*) for baseline conditions using the SHRP 2 L03 “data poor” equations:

$$TTI_{80} = 1 + 2.1406 * \ln(TTI_m)$$

$$TTI_{50} = TTI_m^{0.8601}$$

The travel time equivalents (*TTI_e*) for baseline conditions were then calculated using the following equation:

¹ IDAS User’s Manual, Appendix B, Tables B.2.14 – B.2.18, <http://idas.camsys.com/documentation.htm>

$$TTI_e = TTI_m + a * (TTI_{80} - TTI_{50})$$

Where:

TTI_e is the TTI equivalent on the segment

a is the Reliability Ratio (Value of Reliability/Value of Time), set equal to 0.8 for now. (Further work is needed to more tightly define the Reliability Ratio. SHRP 2 Project C04 suggests a range of 0.5 to 1.5, while previous research indicates that the value of reliability varies by trip purpose. A value of 0.8 was used to represent composite trips.)

TTI_m was used to compute the Planning Time Index for baseline conditions using the SHRP 2 L03 “data poor” equations:

$$\text{Planning Time Index} = TTI_{95} = 1 + 3.6700 * \ln(TTI_m)$$

Baseline reliability benefits for the Regional ITS Architecture Update projects (as excerpted from the spreadsheet) are summarized in Table A-6.

Table A-5 Input Data for Knoxville ITS Architecture Projects

Segment	Study Period	INPUT DATA						
		Segment Type	Number of Lanes	Free Flow Speed	Percent Green	Capacity	VMT	Peak Hour Volume
Segment 1 - I-40 from U.S. 321 (Exit 364) to I-40/75 Interchange (Exit 368)	1	Freeway	2	65	0	4,145	200,585	3,125
Segment 2 - I-75 from U.S. 321 (Exit 81) to I-40/75 Interchange (Exit 84)	1	Freeway	2	65	0	4,145	228,505	4,689
Segment 3 - I-40/75 from I-40/75 Interchange (Exit 368) to near Lovell Rd (Exit 374)	1	Freeway	2	65	0	6,495	845,083	7,297
Segment 1 - I-140 to Gov John Sevier Hwy	1	Freeway	2	65	0	4,066	230,634	4,215
Segment 2 - Gov John Sevier Hwy to near Cherokee Trail	1	Freeway	2	65	0	3,846	204,047	4,213
Segment 1 - near Merchant Dr (Exit 108) to Emory Rd (Exit 112)	1	Freeway	2	65	0	6,224	313,708	4,806
Segment 1 - near Westland Dr (Exit 3) to US 129 (Exit 11)	1	Freeway	2	65	0	4,330	608,238	4,945
Segment 1 - I-40 from I-140 (Exit 376) to I-640 (Exit 385)	1	Freeway	3	65	0	8,299	1,458,962	9,750
Segment 1 - Illinois Ave from Robertsville Rd to Tulane Ave	1	Arterials(interrupted)	2	45	0.55	2,090	27,907	1,825
Segment 2 - Illinois Ave from Tulane Ave to Lafayette Dr	1	Arterials(interrupted)	2	45	0.55	2,090	29,757	2,274
Segment 3 - Oak Ridge Tpk from Illinois Ave to Florida Ave	1	Arterials(interrupted)	2	45	0.55	2,090	71,577	1,894
Segment 4 - Lafayette Dr from Oak Ridge Tpk to Bear Creek Rd	1	Arterials(interrupted)	2	45	0.55	2,090	51,590	1,837
Segment 1 - Solway to Illinois Ave	1	Arterials(interrupted)	2	45	0.55	2,090	163,840	3,793
Segment 1 - US 129 from Pellissippi Pkwy to Hunt Rd	1	Arterials(interrupted)	3	45	0.55	3,135	143,460	4,454
Segment 2 - US 129 from Hunt Rd to US 411	1	Arterials(interrupted)	2	45	0.55	2,090	212,503	3,465
Segment 3 - SR 35 from US 129 to US 321	1	Arterials(interrupted)	2	45	0.55	2,090	73,990	1,891
Segment 1 - Kingston Pk from Northshore Dr to Pellissippi Pkwy	1	Arterials(interrupted)	2	45	0.55	2,090	281,355	2,040
Segment 1 - SR 66 from I-40 to Chapman Hwy	1	Arterials(interrupted)	3	45	0.55	3,135	362,032	2,989
Segment 2 - US 441 from Chapman Hwy to Dollywood Ln	1	Arterials(interrupted)	3	45	0.55	3,135	388,252	3,803
Segment 3 - US 411 (Dolly Parton Pkwy) from SR 66 to Veterans Blvd	1	Arterials(interrupted)	3	45	0.55	3,135	63,467	3,241

Table A-6 Baseline Speed, Delay, and Reliability Measures

Segment	BASELINE SPEED AND DELAY ESTIMATES						BASELINE RELIABILITY MEASURES				
	Speed	Travel Rate (TR)	V/C for Incident Delay	Revised V/C for Incident Delay	Recurring Delay (Hours/ VMT)	Incident Delay (DU) (Hours/ VMT)	TTI _m	TTI ₈₀	TTI ₅₀	TTI _e	PTI
Segment 1 - I-40 from U.S. 321 (Exit 364) to I-40/75 Interch	64.24	0.0156	0.7540	0.7540	0.0002	0.0015	1.109	1.2223	1.0934	1.1965	1.3812
Segment 2 - I-75 from U.S. 321 (Exit 81) to I-40/75 Intercha	42.69	0.0234	1.1314	1.0000	0.0080	0.0199	2.816	3.2158	2.4359	3.0599	4.7990
Segment 3 - I-40/75 from I-40/75 Interchange (Exit 368) to	43.02	0.0232	1.1234	1.0000	0.0079	0.0199	2.804	3.2071	2.4274	3.0512	4.7840
Segment 1 - I-140 to Gov John Sevier Hwy	47.24	0.0212	1.0368	1.0000	0.0058	0.0199	2.669	3.1015	2.3265	2.9465	4.6029
Segment 2 - Gov John Sevier Hwy to near Cherokee Trail	44.23	0.0226	1.0957	1.0000	0.0072	0.0199	2.763	3.1753	2.3966	3.0196	4.7295
Segment 1 - near Merchant Dr (Exit 108) to Emory Rd (Exi	64.03	0.0156	0.7722	0.7722	0.0002	0.0017	1.128	1.2571	1.1088	1.2275	1.4408
Segment 1 - near Westland Dr (Exit 3) to US 129 (Exit 11)	42.27	0.0237	1.1420	1.0000	0.0083	0.0199	2.831	3.2274	2.4473	3.0714	4.8188
Segment 1 - I-40 from I-140 (Exit 376) to I-640 (Exit 385)	41.07	0.0244	1.1748	1.0000	0.0090	0.0175	2.719	3.1409	2.3637	2.9855	4.6705
Segment 1 - Illinois Ave from Robertsville Rd to Tulane A	44.43	0.0225	0.8731	0.8731	0.0003	0.0041	1.197	1.3847	1.1672	1.3412	1.6595
Segment 2 - Illinois Ave from Tulane Ave to Lafayette Dr	40.27	0.0248	1.0878	1.0000	0.0026	0.0199	2.013	2.4972	1.8250	2.3628	3.5669
Segment 3 - Oak Ridge Tpk from Illinois Ave to Florida Av	44.18	0.0226	0.9062	0.9062	0.0004	0.0057	1.273	1.5172	1.2310	1.4600	1.8868
Segment 4 - Lafayette Dr from Oak Ridge Tpk to Bear Cree	44.39	0.0225	0.8788	0.8788	0.0003	0.0043	1.208	1.4045	1.1765	1.3589	1.6935
Segment 1 - Solway to Illinois Ave	28.09	0.0356	1.8149	1.0000	0.0134	0.0199	2.497	2.9589	2.1970	2.8065	4.3584
Segment 1 - US 129 from Pellissippi Pkwy to Hunt Rd	31.72	0.0315	1.4209	1.0000	0.0093	0.0175	2.205	2.6929	1.9743	2.5492	3.9024
Segment 2 - US 129 from Hunt Rd to US 411	29.13	0.0343	1.6580	1.0000	0.0121	0.0199	2.440	2.9092	2.1536	2.7581	4.2733
Segment 3 - SR 35 from US 129 to US 321	44.19	0.0226	0.9050	0.9050	0.0004	0.0056	1.270	1.5118	1.2283	1.4551	1.8775
Segment 1 - Kingston Pk from Northshore Dr to Pellissipp	43.30	0.0231	0.9759	0.9759	0.0009	0.0133	1.636	2.0536	1.5271	1.9483	2.8064
Segment 1 - SR 66 from I-40 to Chapman Hwy	43.64	0.0229	0.9535	0.9535	0.0007	0.0079	1.388	1.7021	1.3259	1.6269	2.2038
Segment 2 - US 441 from Chapman Hwy to Dollywood Ln	35.94	0.0278	1.2132	1.0000	0.0056	0.0175	2.038	2.5245	1.8452	2.3887	3.6138
Segment 3 - US 411 (Dolly Parton Pkwy) from SR 66 to Vet	42.84	0.0233	1.0338	1.0000	0.0011	0.0175	1.837	2.3017	1.6871	2.1788	3.2317

Estimate “Improved” Reliability Benefits

Knoxville TPO used the following steps and equations from the Technical Reference to estimate the reliability benefits of the proposed projects.

First, potential impacts of the strategies were identified by reviewing factors developed both as part of the SHRP 2 L07 project and the IDAS tool default assumptions. Table A-7 shows the various strategies and their assumed impact.

Table A-7 Proposed Corridor Reliability Strategies and Their Assumed Impact

Strategy	Assumed Impacts
Smartway Expansion	Incident duration decreased by 30%
Incident management and freeway service patrol (corridor wide)	Incident duration decreased by 30%
Ramp metering (corridor wide)	New delay = ((1-0.13)(original total delay)) + 0.16 hrs per 1000 VMT
DMS Deployment	Incident delay decreased by 1%
CCTV Camera Deployment	Incident duration decreased by 4.5%

Calculate increase in V/C ratio based on assumed impacts.

Since the proposed corridor reliability strategies include incident management and other strategies that lower the incident rate (frequency of occurrence), the adjusted (“after”) delay was calculated as follows:

$$D_a = D_u * (1-R_f) * (1-R_d)^2$$

Where:

D_a = Adjusted delay (hours of delay per mile)

D_u = Unadjusted (base) delay (hours of delay per mile, from the incident rate tables)

R_f = Reduction in incident frequency expressed as a fraction (with $R_f = 0$ meaning no reduction, and $R_f = .30$ meaning a 30 percent reduction in incident frequency)

R_d = Reduction in incident duration expressed as a fraction (with $R_d = 0$ meaning no reduction, and $R_d = .30$ meaning a 30-percent reduction in incident duration).

Changes in incident frequency are most commonly affected by strategies that decrease crash rates. However, crashes are only about 20 percent of total incidents. Therefore, a 30 percent reduction in crash rates alone would reduce overall incident rates by 6 percent ($.30 \times .20 = .06$).

Compute the Overall Mean Travel Time Index (TTI_m) for the improved condition, which includes the effects of recurring and incident delay:

$$TTI_m = 1 + FFS * (RecurringDelay + IncidentDelay)$$

The TTI_m was used to compute the 80th and 50th percentile travel time indices (TTI_{80} , TTI_{50}) for improved conditions using the SHRP 2 L03 “data poor” equations:

$$TTI_{80} = 1 + 2.1406 * \ln(TTI_m)$$

$$TTI_{50} = TTI_m^{0.8601}$$

The travel time equivalents (TTI_e) for improved conditions were then calculated using the following equation:

$$TTI_e = TTI_m + a * (TTI_{80} - TTI_{50})$$

Where:

TTI_e is the TTI equivalent on the segment

a is the Reliability Ratio (Value of Reliability/Value of Time), set equal to 0.8 for now

TTI_m was used to compute the Planning Time Index for improved conditions using the SHRP 2 L03 “data poor” equations:

$$\text{Planning Time Index} = TTI_{95} = 1 + 3.6700 * \ln(TTI_m)$$

“After” reliability benefits for the Regional ITS Architecture Update projects are summarized in Table A-8.

Table A-8 Improved Speed, Delay, and Reliability Measures

Segment	Increased V/C for Speed	IMPROVED SPEED AND DELAY ESTIMATES				IMPROVED RELIABILITY MEASURES				
		Speed	TR	Incident Delay (Da) (Hours per VMT)	Recurring Delay (Hours per VMT)	TTI _m	TTI ₈₀	TTI ₅₀	TTI _e	PTI
Segment 1 - I-40 from U.S. 321 (Exit 364) to I-40/75 Intercha	0.7540	64.24	0.0156	0.0007	0.0002	1.060	1.124	1.051	1.109	1.213
Segment 2 - I-75 from U.S. 321 (Exit 81) to I-40/75 Intercha	1.1314	42.69	0.0234	0.0097	0.0080	2.156	2.645	1.936	2.503	3.820
Segment 3 - I-40/75 from I-40/75 Interchange (Exit 368) to	1.1234	43.02	0.0232	0.0097	0.0079	2.145	2.633	1.928	2.492	3.800
Segment 1 - I-140 to Gov John Sevier Hwy	1.0368	47.24	0.0212	0.0097	0.0058	2.010	2.494	1.823	2.360	3.561
Segment 2 - Gov John Sevier Hwy to near Cherokee Trail	1.0957	44.23	0.0226	0.0097	0.0072	2.103	2.592	1.896	2.452	3.729
Segment 1 - near Merchant Dr (Exit 108) to Emory Rd (Exit	0.7722	64.03	0.0156	0.0008	0.0002	1.070	1.145	1.060	1.128	1.249
Segment 1 - near Westland Dr (Exit 3) to US 129 (Exit 11)	1.1420	42.27	0.0237	0.0097	0.0083	2.171	2.660	1.948	2.517	3.845
Segment 1 - I-40 from I-140 (Exit 376) to I-640 (Exit 385)	1.0878	44.59	0.0224	0.0175	0.0070	2.594	3.040	2.270	2.886	4.498
Segment 1 - Illinois Ave from Robertsville Rd to Tulane Av	0.8084	44.73	0.0224	0.0041	0.0001	1.190	1.372	1.161	1.330	1.638
Segment 2 - Illinois Ave from Tulane Ave to Lafayette Dr	1.0073	44.30	0.0226	0.0199	0.0004	1.911	2.386	1.745	2.258	3.377
Segment 3 - Oak Ridge Tpk from Illinois Ave to Florida Ave	0.8390	44.61	0.0224	0.0057	0.0002	1.263	1.500	1.223	1.445	1.858
Segment 4 - Lafayette Dr from Oak Ridge Tpk to Bear Cree	0.8137	44.72	0.0224	0.0043	0.0001	1.201	1.391	1.170	1.347	1.671
Segment 1 - Solway to Illinois Ave	1.8149	28.09	0.0356	0.0195	0.0134	2.479	2.943	2.183	2.791	4.332
Segment 1 - US 129 from Pellissippi Pkwy to Hunt Rd	1.4209	31.72	0.0315	0.0159	0.0093	2.136	2.625	1.921	2.484	3.785
Segment 2 - US 129 from Hunt Rd to US 411	1.6580	29.13	0.0343	0.0181	0.0121	2.361	2.839	2.094	2.690	4.153
Segment 3 - SR 35 from US 129 to US 321	0.9050	44.19	0.0226	0.0051	0.0004	1.248	1.474	1.210	1.421	1.813
Segment 1 - Kingston Pk from Northshore Dr to Pellissippi	0.9759	43.30	0.0231	0.0130	0.0009	1.624	2.038	1.517	1.934	2.780
Segment 1 - SR 66 from I-40 to Chapman Hwy	0.8513	44.55	0.0224	0.0079	0.0002	1.367	1.669	1.309	1.597	2.148
Segment 2 - US 441 from Chapman Hwy to Dollywood Ln	1.0832	40.47	0.0247	0.0175	0.0025	1.898	2.372	1.735	2.245	3.352
Segment 3 - US 411 (Dolly Parton Pkwy) from SR 66 to Vete	0.9230	44.01	0.0227	0.0175	0.0005	1.809	2.269	1.665	2.148	3.175

Conduct Benefits Analysis

Once the reliability benefits were calculated, Knoxville TPO conducted a benefits analysis to determine the annual delay savings associated with the candidate projects. Reliability was equilibrated to average travel time through the use of “travel time equivalents”, so the annual delay savings includes the value of reliability.

For both the baseline and improved condition, the total equivalent delay was calculated based on the TTI_e :

$$\text{TotalEquivalentDelay} = (TTI_e / \text{FreeFlowSpeed} - 1 / \text{FreeFlowSpeed}) * \text{VMT}$$

Where:

TotalEquivalentDelay is in vehicle-hours

$(TTI_e / \text{FreeFlowSpeed})$ is the unit travel rate (hours/mile)

The annual delay savings was calculated based on the difference in total equivalent delay between the “before” and “after” scenarios:

$$\text{AnnualDelaySavings} = (\text{TotalEquivDelay}_{\text{Before}} - \text{TotalEquivDelay}_{\text{After}}) * 260$$

Prioritize Projects

Table A-9 presents the results of applying the benefits methodology. The top five projects offering the highest annual delay savings are:

Region 1 Smartway Expansion - I-40 and I-75 West of Knoxville-Segment 3 - I-40/75 from I-40/75 Interchange (Exit 368) to near Lovell Rd (Exit 374) - 944,973 veh-hrs of delay savings

Region 1 Smartway Expansion - I-140 South of Knoxville-Segment 1 - near Westland Dr (Exit 3) to US 129 (Exit 11) - 673,920 veh-hrs of delay savings

TDOT Ramp Metering-Segment 1 - I-40 from I-140 (Exit 376) to I-640 (Exit 385) - 190,091 veh-hrs of delay savings

Region 1 Smartway Expansion - US 129/SR 115 (Alcoa Hwy)-Segment 1 - I-140 to Gov John Sevier Hwy - 270,646 veh-hrs of delay savings

Region 1 Smartway Expansion - I-40 and I-75 West of Knoxville-Segment 2 - I-75 from U.S. 321 (Exit 81) to I-40/75 Interchange (Exit 84) - 254,505 veh-hrs of delay savings

Table A-9 Benefits of Improved Operations, Knoxville TPO ITS Architecture Projects

Segment	2034 Peak Hour – Before Improvement		2034 Peak Hour – After Improvement		Annual Delay Savings (veh-hrs)
	TTI _m	Equivalent Delay (daily veh-hrs)	TTI _m	Equivalent Delay (daily veh-hrs)	
Region 1 Smartway Expansion - I-40 and I-75 West of Knoxville-Segment 1 - I-40 from U.S. 321 (Exit 364) to I-40/75 Interchange (Exit 368)	1.109	303	1.060	169	34,920
Region 1 Smartway Expansion - I-40 and I-75 West of Knoxville-Segment 2 - I-75 from U.S. 321 (Exit 81) to I-40/75 Interchange (Exit 84)	2.813	3,621	2.155	2,642	254,505
Region 1 Smartway Expansion - I-40 and I-75 West of Knoxville-Segment 3 - I-40/75 from I-40/75 Interchange (Exit 368) to near Lovell Rd (Exit 374)	2.802	13,334	2.144	9,699	944,973
Region 1 Smartway Expansion - US 129/SR 115 (Alcoa Hwy)-Segment 1 - I-140 to Gov John Sevier Hwy	2.667	3,453	2.009	2,412	270,646
Region 1 Smartway Expansion - US 129/SR 115 (Alcoa Hwy)-Segment 2 - Gov John Sevier Hwy to near Cherokee Trail	2.761	3,170	2.102	2,280	231,485
Region 1 Smartway Expansion - I-75 North of Knoxville-Segment 1 - near Merchant Dr (Exit 108) to Emory Rd (Exit 112)	1.127	549	1.070	309	62,246
Region 1 Smartway Expansion - I-140 South of Knoxville-Segment 1 - near Westland Dr (Exit 3) to US 129 (Exit 11)	2.829	9,691	2.170	7,099	673,920
TDOT Ramp Metering-Segment 1 - I-40 from I-140 (Exit 376) to I-640 (Exit 385)	2.719	22,282	2.594	21,167	290,091
City of Oak Ridge Traffic Signal System Upgrades-Segment 1 - Illinois Ave from Robertsville Rd to Tulane Ave	1.197	106	1.190	102	892
City of Oak Ridge Traffic Signal System Upgrades-Segment 2 - Illinois Ave from Tulane Ave to Lafayette Dr	2.012	451	1.910	416	9,000
City of Oak Ridge Traffic Signal System Upgrades-Segment 3 - Oak Ridge Tpk from Illinois Ave to Florida Ave	1.273	366	1.263	354	3,142
City of Oak Ridge Traffic Signal System Upgrades-Segment 4 - Lafayette Dr from Oak Ridge Tpk to Bear Creek Rd	1.208	206	1.201	199	1,747
City of Oak Ridge DMS Deployment-Segment 1 - Solway to Illinois Ave	2.496	3,289	2.478	3,261	7,116
Cities of Maryville & Alcoa CCTV Camera Deployment-Segment 1 - US 129 from Pellissippi Pkwy to Hunt Rd	2.205	2,469	2.136	2,365	27,047
Cities of Maryville & Alcoa CCTV Camera Deployment-Segment 2 - US 129 from Hunt Rd to US 411	2.438	4,151	2.360	3,990	41,851
Cities of Maryville & Alcoa CCTV Camera Deployment-Segment 3 - SR 35 from US 129 to US 321	1.269	374	1.247	346	7,226
City of Knoxville DMS Deployment-Segment 1 - Kingston Pk from Northshore Dr to Pellissippi Pkwy	1.636	2,965	1.625	2,919	11,750
Combined City of Pigeon Forge & Sevierville Adaptive Signal System-Segment 1 - SR 66 from I-40 to Chapman Hwy	1.388	2,522	1.367	2,402	31,003
Combined City of Pigeon Forge & Sevierville Adaptive Signal System-Segment 2 - US 441 from Chapman Hwy to Dollywood Ln	2.038	5,991	1.898	5,370	161,452
Combined City of Pigeon Forge & Sevierville Adaptive Signal System-Segment 3 - US 411 (Dolly Parton Pkwy) from SR 66 to Veterans Blvd	1.837	831	1.809	810	5,654

A.6 CONCLUSIONS/LESSONS LEARNED

The case study was successful in establishing an initial framework for an ongoing reliability performance monitoring system. It demonstrated how various reliability performance indices and incident duration can be calculated using archived traffic volume, speed and incident data from a regional ITS freeway management system. This is a critical first step in identifying reliability deficiencies on freeway segments and potential traffic operations strategies for improving reliability on these segments.

It also demonstrated how agencies can formulate travel time reliability and incident duration goals and set specific targets for their region based on reliability and incident duration analysis results. These can be incorporated as criteria in the long-range transportation plan development process as well as in operations planning.

Finally, the case study showed how agencies can use sketch planning methods and the “data poor” reliability prediction equations from SHRP 2 L03 to assess the reliability benefits for operations strategies within a Regional ITS Architecture and then build a roster of operations projects for inclusion in the LRTP.

B. Florida Department of Transportation (FDOT)

B.1 OBJECTIVE

The objective of the case study is to document Florida DOT's efforts to incorporate travel time reliability into their planning and programming process. Florida has developed reliability measures for both planning (system focused) and operations (corridor focused). These measures are being incorporated into Florida DOT's short range decision support tool (the Strategic Investment Tool (SIT)), which is used to prioritize projects for inclusion in the State Transportation Improvement Program (STIP). The Planning office has also developed modeling techniques for predicting the impact of projects on travel time reliability. In addition, both offices are very interested in the economic value of projects and return on investment of operations improvements.

The case study documents these activities and provides validation for the following steps in the Reference Guide:

- Measuring and Tracking Reliability;
- Incorporating Reliability in Policy Statements; and
- Incorporating Reliability Measures into Program and Project Investment Decisions.

B.2 MEASURING AND TRACKING RELIABILITY

Select a Reliability Performance Measure

In 2005, FDOT adopted travel time reliability as a performance measure to be reported to the Florida Transportation Commission on an annual basis. Definitions and data requirements for reporting reliability were developed in 2006, and the FDOT State Traffic Engineering and Operations Office began monitoring travel time reliability on ITS instrumented corridors in Districts 2, 5 and 7 in 2008. Florida identified two metrics for travel time reliability – the Buffer Index (to measure and track the variability of roadway congestion) and the Travel Time Index (to measure and track the congestion level). The travel time and speed data needed to report on reliability are obtained from real-time roadside detectors or vehicle probe data from various sources that report travel time directly. The SHRP 2 L03 project noted that travel time index is a better measure than the buffer index, so FDOT plans to stop using the buffer index.

Estimate Reliability Performance

To enable reporting of reliability at a statewide level, FDOT recognized the need for a predictive model for obtaining the travel time distribution and all associated performance measures for all the freeways in Florida, not just those instrumented with ITS. The Systems Planning Office commissioned the University of Florida to develop a travel time reliability model for the state's freeway system to address this issue. The model considers various conditions that may occur over a year (e.g., recurring traffic congestion, weather, incidents, and work zones) and calculates the expected travel times for each scenario, along with the expected frequency of occurrence². The model assembles the expected travel times and frequency of occurrence to obtain the travel time distribution for a section of roadway, which is then used to calculate reliability based on-time arrival (percent of time travel speed is greater than 10 miles per hour less than the speed limit) and buffer index (computed as the difference between the 95th percentile travel time and average travel time, divided by the average travel time).

There are differences in travel time between the Operations and Planning Offices due to the different data sources used (i.e., travel time for Operations is based on real-time data, while Planning uses modeled data). FDOT is examining these differences and continuing to make refinements to the travel time reliability model by comparing modeled results to those based on travel time monitoring data.

Regular quarterly meetings are held between Planning and Operations staff to discuss projects and initiatives related to travel time reliability.

Report Reliability Performance

An Annual Performance Report documents the Department's short-term objectives, strategies and progress toward implementing the goals and long-range objectives of the 2060 FTP.

B.3 INCORPORATING RELIABILITY IN POLICY STATEMENTS

Develop Policy Statement

The 2060 Florida Transportation Plan (FTP) defines the State's long range goals, objectives and strategies to guide Florida's transportation planning and investment decision-making over the next 50 years. Travel time reliability is emphasized in the State's goals to "maintain and operate Florida's transportation system proactively" and to "improve mobility and connectivity for

² McLeod, D., L. Elefteriadou, and L. Jin. Travel Time Reliability as a Performance Measure: Applying Florida's Predictive Model on the State's Freeway System. TRB 2012 Annual Meeting.

people and freight.” Reliability is specifically cited in the long range objectives to “optimize the efficiency of the transportation system for all modes” and “increase the efficiency and reliability of travel for people and freight.”

Performance measures are used to monitor progress toward achieving the 2060 FTP goals and objectives. The plan emphasizes performance monitoring and operations improvements in the following strategies:

- Monitor the physical condition, operational performance, and use of Florida’s transportation system and use these data to inform investment decisions;
- Plan for and deploy a network of sensors and communications infrastructure, along with supporting databases and models, to monitor and manage the performance of critical infrastructure on all modes on a real time basis; and
- Emphasize transportation systems management and operations strategies to optimize performance of existing facilities.

B.4 INCORPORATING RELIABILITY MEASURES INTO PROGRAM AND PROJECT INVESTMENT DECISIONS

Develop Funding Scenarios

The Florida Legislature established Florida’s Strategic Intermodal System (SIS) in 2003, which is a statewide network of high priority transportation facilities and services including the State’s largest and most significant commercial service airports, spaceport, deepwater seaports, freight rail terminals, passenger rail and intercity bus terminals, rail corridors, waterways and highways. FDOT is statutorily required to develop and update a plan for implementing the SIS, including a needs assessment, project prioritization process, and a finance plan based on anticipated revenue projections, including both 10-year and 20-year cost-feasible components. All designated SIS facilities are eligible for funding from the State Transportation Trust Fund.

Funding for the SIS is not modal specific; the programming process gives equal consideration to all components of the SIS, regardless of who owns the facility. At the programming level, performance measures are used to inform the financial policies that determine how funds are allocated across numerous programs such as highway preservation, system expansion, and public transportation.

One of Florida’s biggest challenges has been incorporating reliability (specifically operations improvements) into the programming process. FDOT’s policy is to fund only certain types of projects (i.e., those that expand capacity) with SIS funding. This is a policy decision that was carried over from the Florida Intrastate Highway System (FIHS) that ensures state managed funds are being used to add capacity to the system. Some types of operations improvements

are considered capacity projects and are eligible for funding. For example, FDOT considers managed lanes and auxiliary lanes to be capacity improvements. Intersection/interchange improvements are considered if the project adds lanes or changes the configuration, but traffic signal timing improvements and synchronization are not eligible. Ramp signals are considered if the project involves a redesign of an interchange. Bus rapid transit projects are considered if they include dedicated bus lanes.

At the time of the case study, FDOT was going through its annual programming process, and they are identifying policies or statutory changes that need to be addressed, especially as they affect program funding and target setting decision-making. The FDOT Program and Resource Plan is the best place to make a change in how operations improvements are funded. Policy changes could also occur because of performance data. For example, maintenance conditions are currently exceeding standards in all areas (e.g., maintenance, bridge and pavement). There is a big difference between current condition and minimum standards, and some of this funding could be directed to other areas such as operations improvements.

Develop a Project List

The SIT is one of the tools used in the project prioritization and select process, and it allows the Department to prioritize projects and investment needs in order to meet the goals and objectives in the 2060 FTP. The SIT can be used to evaluate highway capacity expansion projects and connector projects currently eligible for SIS funding. Examples are projects that provide additional travel lanes, additional throughput for passenger trips, or operational improvements that provide additional throughput.

The SIT provides allows users to develop a project list based on scenarios of various proposed project groupings. For example, a District could use the SIT to evaluate all projects in their District currently included in the long-term SIS Unfunded Needs Plan, or a subset of projects for a specific corridor within their District.

Detailed information for each project in the SIS Unfunded Needs Plan, Cost Feasible Plan, Work Program, and Multimodal Needs Plan is maintained on the SIT server. This includes project name, facility, roadway ID and begin/end mileposts, project limits, roadway classification, interchange type, bottleneck/grade separation, number of lanes added, and urban/rural classification. Users can also enter detailed project information for projects not currently included in these plans.

Develop Weights for Measures

The SIT allows users to assign a weighting percentage to each of the six goals of the 2060 FTP, as shown in Table B-1. The system defaults to equal weighting of SIS goals, but users can select any weighting combination depending on project type, corridor or program level policy objectives. The weighting must always add up to 100 percent. For example, a user assessing a set of freeway capacity projects might decide that all criteria are equally important and assign weighting percentages equally. An equal weighting for each of the goal areas would be used.

A user assessing a set of operations and management projects designed to address non-recurring delay might assign more weighting to the Maintenance and Operations goal.

Table B-1 Weighting for 2060 FTP Goals

2060 FTP Goal	Example Weighting
Safety and Security: Provide a safe and secure transportation system for all users	20%
Maintenance and Operations: Maintain and operate Florida's transportation system proactively	20%
Mobility and Connectivity: Improve mobility and connectivity for people and freight	20%
Economic Competitiveness: Invest in transportation systems to support a prosperous, globally competitive economy	20%
Livable Communities: Make transportation decisions to support and enhance livable communities	10%
Environmental Stewardship: Make transportation decisions to promote responsible environmental stewardship	10%
Total Weighting	100%

Identify Performance Measures

The SIT evaluates and prioritizes candidate projects based on a set of performance measures that relate to each of the six goals of the 2060 Florida Transportation Plan, as shown in Table B-2. Maximum scores are assigned for each performance measure based on its importance to the goal area, and then a total score is calculated across all performance measures and goal areas.

FDOT is in the process of realigning the SIT performance measures to the 2060 Florida Transportation Plan, including adding a measure for Travel Time Reliability. The Department has received District comments on the proposed measures, and they are now in the process of incorporating the measures into the SIT server so they can be used to evaluate projects.

Table B-2 Performance Measures for the Strategic Investment Tool

2060 FTP Goal	Performance Measures
Safety and Security (5 measures)	Crash Ratio
	Fatal Crash Ratio
	Bridge Appraisal Rating
	Link to Military Bases
	Emergency Evacuation
Maintenance and Operations (4 measures)	Travel Time Reliability
	Truck Volume (AADTT)
	Adaptation Measure
	Bridge Condition Rating

2060 FTP Goal	Performance Measures
Mobility and Connectivity (8 measures)	Connector Location
	Volume/Capacity (v/c) Ratio
	Truck Percentage (% Trucks)
	Vehicular Volume (AADT)
	System Gap
	Change in v/c or Interchange Operations
	Bottleneck/Grade Separation
	Delay
Economic Competitiveness (14 measures)	Rural Areas of Critical Economic Concern
	Workforce Size
	Educational Attainment Level
	Population Growth Rate
	Per Capita Income
	Freight Employment Intensity
	Property Taxes
	Freight Transportation Infrastructure
	Military Bases Employment
	Per Capita Income
	Number of Visitors
	Institutions of Higher Education
	Medical Centers
	Tech Centers
Livable Communities (7 measures)	Residential and Community Impacts
	Population Density
	Transit Connectivity
	Bicycle/Pedestrian Access
	Managed Lanes/Special Use
	Social Investment/Justice
	Personal Safety
Environmental Stewardship (14 measures)	Farmlands
	Geology
	Archeological/Historical Sites
	Contamination
	Conservation and Preservation
	Wildlife and Habitat
	Flood Plains/Flood Control
	Coastal/Marine
	Special Designations
	Water Quality
	Wetlands
	Air Quality
	Energy and Sustainability

Estimate the Project Score

Projects are assigned a maximum score for each performance measure based on an established categorization and scoring process as described in FDOT's Strategic Investment Tool Handbook. For travel time reliability, candidate projects are scored a maximum of 8 points based on their expected impact on travel time reliability. Project scores are assigned based on the travel time reliability (i.e., the Travel Time Index (TTI)) for the roadway segment where the project is located.

Roadway segments are assigned an impact category (e.g., high, medium, low) based on the magnitude of its TTI. The facilities with the highest TTI values are considered the worst in terms of reliability (i.e., the facility is unable to consistently handle demand during peak hours and are considered high impact). Projects located on high impact facilities (i.e., roadways with the worst reliability) are assigned a higher score, while those with lower impact levels score fewer points, as shown in Table B-3.

FDOT is currently in the process of testing the scoring mechanism to see how reliability results affect the ranking of projects. They also plan to incorporate their predictive travel time reliability model into the SIT to provide reliability data at a statewide level. The use of reliability as a performance measure will be part of the decision-making process starting in 2013.

Table B-3 Project Scoring for Travel Time Reliability

Performance Measure	Travel Time Index Range	Impact Category	Score
Travel Time Reliability	1.261 to 2.04	High	8
	1.061 to 1.26	Medium	4
	1.00 to 1.06	Low	0

One of the limitations of the SIT is that it is applicable only to evaluating and prioritizing highway capacity expansion projects located on existing roadways. Because the SIT is geometry-based and uses Florida's current roadway basemap, projects involving new roadway construction or alignments will typically score low because the roadway has not been entered into the basemap. The SIT has never been used to prioritize operations improvements, although it may be possible to use the tool to prioritize these projects as long as those goals are weighted more heavily than the others.

There is currently a gap in performance measures to support economic competitiveness, but it will be supplemented by a Benefit-Cost (BC) tool being developed by the Office of Policy Planning. Return on Investment (ROI) is currently not included in the SIT because each District and SIS modality has its own methodology for conducting BC analyses and prioritizing projects. The BC tool could provide a way to standardize that process and have common performance measures across all modes. A research and development study to develop the BC

methodology was scheduled to be completed by June 2012. Executive Management will then decide how to implement the methodology into the SIS programming process going forward.

It is anticipated that the BC tool will be used to calculate ROI for major projects costing more than \$50 million. The BC tool will consider forecasted conditions for individual projects (e.g., forecasted traffic volumes, number of lanes, etc.) and run an economic analysis to calculate return on investment for that project. Operations improvements such as tolled facilities, managed lanes, interchanges, and new facilities would be difficult to incorporate into the methodology from a demand forecast perspective, since it is difficult to forecast traffic volumes for these types of improvements 30 to 40 years out. The toll is also not intended for program level analysis. There are thousands of projects on the highway side, and it would be difficult to aggregate ROI results for these projects.

Because the objective of the SIS is to improve through movement, operations improvements could provide significant operational benefits on arterials. Operations improvements could also be implemented as an interim measure to extend the need for capacity improvements. However, FDOT would need the capability to assess how much of an operations budget would contribute to improved reliability. There is a need to instrument more arterials in the future with Bluetooth or other technology to collect real-time speed data to support this level of analysis.

B.5 CONCLUSIONS/LESSONS LEARNED

The Florida DOT case study revealed that incorporating reliability (specifically operations projects) into the programming process is a challenging process for most State DOTs. It requires locating a specific funding category to cover operations improvements, although statutory requirements may limit the types of projects that can be funded with existing funding categories. The extent to which this will change as a result of MAP-21 is still to be determined. There are two basic funding models that could be considered: 1) allocating separate funding for operations projects; or 2) allocating a portion of existing capacity funding for operations projects. This has important implications for the SHRP2 L05 project, as it appears many states would benefit from guidance on determining eligibility of funding operations improvements under specific silos or funding categories or making the required policy changes to set up a dedicated funding mechanism. However, because different State DOTs have different programming priorities and processes, it may be difficult to identify a good decision-making model for the long term.

The case study validated the following success factors for incorporating reliability into the planning and programming process:

- Reliability needs to be specifically addressed in the vision, mission, and goals of a plan. These policy statements define the long-term direction of an agency and provide the foundation on which to select reliability performance measures and make the right choices and tradeoffs when setting funding levels and selecting projects.

- Reliability needs to be a well-defined measure with supporting data. Well-defined reliability performance measures define an important, but often overlooked, aspect of customer needs. The measures help to support the development of policy language and are critical to making reasoned choices and balanced tradeoffs.
- Reliability needs to be used to estimate/predict transportation needs and deficiencies including the development and analysis of project/scenario alternatives. Estimating reliability deficiencies using well defined measures helps to define the size and source of the reliability problem and can be used to inform policy makers about how the reliability of the system has been changing over time and how it is expected to change in the future. The maps, charts, and figures provide critical background when making choices and tradeoffs.
- Reliability needs to be used in program level tradeoffs. Bringing reliability into the discussion brings clarity to the issue of balancing operations and capacity funding. Without the consideration of reliability, the tradeoff nearly always tilts toward capacity projects.
- Reliability needs to be an integral component of priority setting/decision making at the project level. Incorporating reliability into project prioritization and programming brings clarity to the issue of choosing the appropriate balance of operations and capacity strategies.

State DOTs would benefit from a maturity model that defines various levels of organizational capability with respect to these success factors. State DOTs could use the maturity model as a tool for: 1) assessing where they stand with respect to incorporating reliability into all components of the planning and programming process; 2) assisting them in understanding common concepts related to the process; and 3) assisting them in identifying next steps to achieve success toward an ultimate goal state. The maturity model should be a living document that is continually refined based on agency capabilities.

C. Los Angeles Metropolitan Transit Authority

C.1 OBJECTIVE

The objective of the Los Angeles (LA) County Arterial Performance Monitoring case study is to develop the preliminary framework for an arterial performance monitoring system, which is being developed by the Los Angeles Metropolitan Transit Authority (LAMTA) as an improved mechanism for prioritizing arterial operations projects for funding.

The case study documents these activities and provides validation for the “Measuring and Tracking Reliability” step in the Reference Guide:

C.2 BACKGROUND

As part of the 2009 Long Range Transportation Plan (LRTP), LAMTA continues to focus on improving arterial traffic flow through the implementation of Transportation System Management (TSM) projects, including Intelligent Transportation Systems (ITS), coordinated signal timing, and bus signal priority. Historically LAMTA has programmed over \$30 million/year to meet regional and sub-regional needs for projects of this nature. Due to a number of financial constraints, the 2009 LRTP Strategic Plan calls for a 50% reduction in TSM funding over the next 30 years. They have annual solicitations for agencies in LA County to apply for funding to improve arterial operations.

LAMTA’s current process for prioritizing arterial operations projects involves conducting before and after evaluations. Data is collected using floating car surveys and spot counts. It is currently a reactive approach in response to incidents and complaints received from the traveling public. The approach is based on local level evaluation using optimization.

Due to the limited amount of funding that will be available for future TSM projects, they are looking for an improved way to prioritize projects that will also set the groundwork for using performance monitoring in improving day to day operations. This will be accomplished through the development of an arterial performance and reliability measurement system that will:

- Feed into the prioritization of program needs;

- Aid in the continuous re-evaluation of the mobility and reliability benefits of completed projects; and
- Include the proper balance between private vehicle and transit priority.

Information generated from the system will be used to

- Guide future planning investment decisions;
- Aid in project development activities;
- Provide insight into the development of a more quantitative approach to project and programming prioritization;
- Assess the impact of TSM improvements on bus operations; and
- Provide a tool for improved management of the transportation system.

C.3 MEASURING AND TRACKING RELIABILITY

Select a Reliability Measure

LAMTA and its sub-regional partners determined that they need an improved way to prioritize projects that incorporates multi-modal reliability. They developed a list of key arterial performance and reliability measures needed to quantify the mobility benefits of individual TSM projects and to demonstrate the efficacy of the overall TSM program. The primary Measures of Effectiveness (MOEs) that will measure their objectives are travel time and travel time reliability. Surrogate measures of travel time or travel time reliability were also considered. These include:

- Level of Service
- Volume
- Occupancy
- Speed
- Travel Times
- Vehicle delay

- Green House Gas Emissions
- Fuel reduction

Assess Data Sources

LAMTA assembled existing sources of available arterial data in the region that can be used to derive the arterial performance and reliability measures. There were two sources of data: detector data from signal systems and transit automatic vehicle location (AVL) data. LAMTA reviewed each of these data sources with respect to their ability to support to the desired metric, including data availability, data quality, and costs to collect/analyze the data, and they determined that data to drive these measures is an issue, both in terms of coverage and consistency across jurisdictions.

For detector data, LAMTA determined that existing detectors have gaps geographically, may not be presented or stored in a consistent manner, and may not be able to derive travel time well. LAMTA has a large archive of transit AVL data, so this was examined as another potential data source. The systems in use in LA County also track dwell time. LAMTA verified that travel time and speeds from door opening to door opening are available and could be used to measure bus travel time. LAMTA will continue to investigate how well that data might be able to meet their needs.

LAMTA also investigated types of surrogate measures that could be calculated with transit data. One approach is to calibrate bus travel time with passenger vehicle travel time and utilize a factor to calculate passenger vehicle travel time. One concern over using the bus travel time data is that the relationship between bus travel times and passenger vehicle travel times will likely vary depending on level of congestion and speed of traffic. The calibration may need to be undertaken over a broad range of speeds in order to be accurate. Another concern is that there are a limited number of data points because there are limited numbers of coaches that travel any given arterial. Finally, there are some arterials on which LAMTA would like to measure performance that have no transit service or such infrequent transit service that performance cannot be measured. Getting robust reliability results from this type of data could be challenging.

Based on the assessment, LAMTA staff defined data gaps and alternative data sources that could be used to support the desired arterial performance and reliability measures, such as advanced detection and probe vehicles. LAMTA investigated third party data sources from the private sector and received a sample set of data for arterials. They also assembled high level cost information for that data. That data has many observations and can provide robust reliability information. However, it is possible that LAMTA will want to measure performance on roadways that do not have sufficient probes to accurately measure reliability. Also, LAMTA is concerned about the long-term cost for that data.

LAMTA also evaluated existing arterial performance measurement systems (PeMS) in coordination with other project initiatives underway throughout LA County. This included

proposing alternative approaches to partners for consensus development, identifying a strategy to fill gaps (including deployment of additional detection systems, if needed), and proposing funding for data development and a demonstration system.

Estimate Reliability Performance

LAMTA is analyzing a number of approaches for calculating performance measures based on available data sources. These include the following options:

- Using existing data sources, primarily the data from arterial signal systems;
- Using transit AVL data;
- Using third party arterial data; and
- Using a hybrid option that includes portions of each.

LAMTA developed a high-level approach to performance measurement to support their arterial operations program based on these options. Next steps will be the development of a proposed strategy for an arterial performance management system and its components.

C.4 CONCLUSIONS/LESSONS LEARNED

This case study documented the development of a preliminary framework for an arterial performance monitoring system. The case study results show that arterial reliability measures require robust data sets that provide sufficient data points on each roadway of interest during all times of interest. Although it is possible to calculate arterial reliability measures from a variety of multi-modal data sources, there is a challenge in collecting large enough samples both spatially and temporally. Data source consistency is critical.

D. Southeast Michigan Council of Governments

D.1 OBJECTIVE

The Southeast Michigan Council of Governments (SEMCOG) is the Metropolitan Planning Organization (MPO) for the Detroit region. As in many regions, the identified need for infrastructure improvements greatly outweighs the available funding levels, so a logical and effective process is needed to assist SEMCOG in setting program funding levels. They developed such a process while preparing their 2035 Regional Transportation Plan (RTP) that allows them to trade off among several program areas, including pavement, bridge, highway capacity, safety, transit, and non-motorized modes. This case study updates that process to assess funding levels required for SEMCOG's roadway operations program by assessing *total* delay, including non-recurring delay, the main cause of unreliable travel.

The case study provides validation for the "Incorporating Reliability into Program and Project Investment Decisions" step in the Reference Guide.

D.2 BACKGROUND

As part of its planning process, SEMCOG has developed a new approach for setting program level funding. Setting program level funding 1) helps build consensus on the region's transportation priorities and helps ensure that the projects included in the RTP support these priorities; 2) provides decision makers with the quantitative information they need to fully understand the consequences of their investment choices; and 3) enables SEMCOG to develop an RTP that is realistic in terms of how much it will cost and how much it can achieve.


To set program funding levels, SEMCOG follows these steps:

1. Define measures of effectiveness and assess current performance.
2. Analyze the relationship between funding and performance within each program area.
3. Develop funding scenarios (each scenario represents a different way of splitting anticipated funds across the program areas used in the RTP).

4. Present the results of the analysis to decision makers in a format that enables them to conduct program-level tradeoffs, with the goal of reaching consensus on long-range funding and performance targets for the region.

Since the completion of the 2035 RTP, SEMCOG has developed a performance curve for the roadway operations program using recurring delay as the MOE. Table D-1 shows the performance curve for the roadway operations program using recurring delay. This case study updates the MOE to *total* delay that includes recurring and non-recurring delay.

Figure D-1 SEMCOG Roadway Operations Investment Levels Mapped to Average Recurring Delay

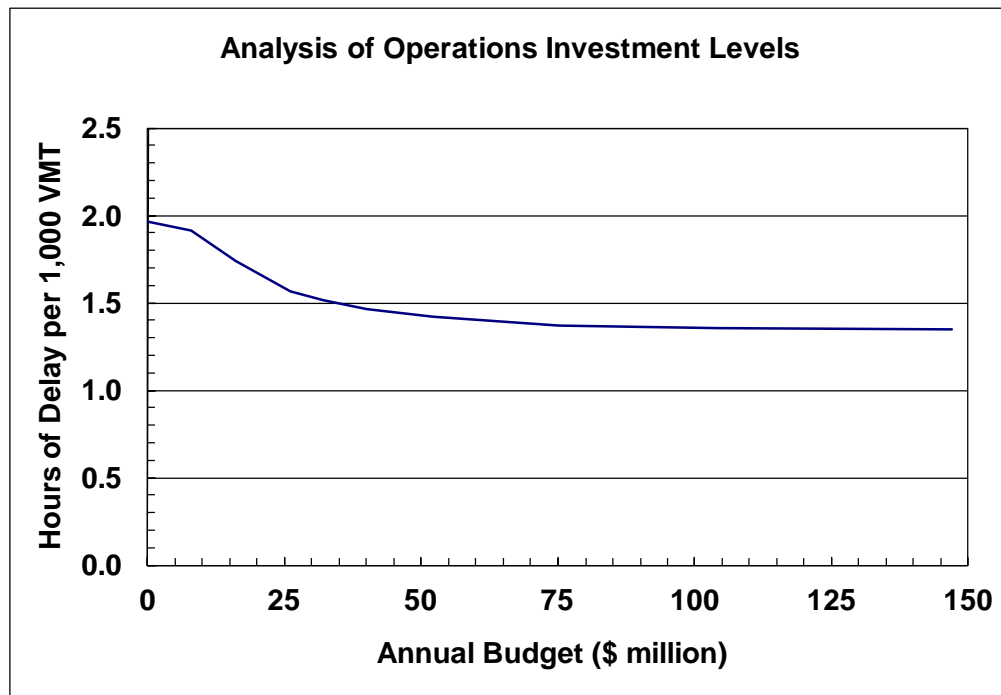

This case study reviewed the measure currently used for highway capacity and identified a potential system measure more appropriate for assessing highway operations. An analysis methodology for prioritizing operations strategies and capital improvements using reliability was also developed and tested as part of the case study.

D.3 INCORPORATING RELIABILITY INTO PROGRAM AND PROJECT INVESTMENT DECISIONS

Define Measures of Effectiveness

Measures of effectiveness (MOE) are measures that indicate how a system is performing. Essentially, an MOE is a single, exemplar performance measure used to indicate the performance of an entire program area. Whereas performance measures typically are used to indicate the many different aspects of performance (that is, for safety, an agency might consider total fatalities, pedestrian and bicycle crashes, serious injury crashes, and rates of the same), they use MOEs as a sort of “best-fit” performance measure or a measure that represents the “gist” of what makes a program area important. To that end, SEMCOG selected MOEs for each of their program areas. Table D-1 lists the MOEs for each program area. SEMCOG incorporated reliability into their MOE for the Roadway Operations program area by estimating non-recurring hours of congestion delay *in addition* to typical recurring hours of congestion delay. Defining the MOE in this way allowed SEMCOG to retain consistency with their Highway Capacity program area MOE that measures hours of recurring congestion delay.

Table D-1 Measures of Effectiveness Used in the Prioritization Process

Program Area	MOE
Pavement Preservation	Percent of pavement in good or fair condition
Highway Capacity	Hours of (recurring) congestion delay per 1,000 vehicle miles traveled
Bridge Preservation	Percent of bridges in good or fair condition
Safety	Fatalities per 100 million vehicle miles traveled
Transit	Extent of the transit network (the existing network or the region's transit vision)
Nonmotorized	Percent of population and employment within ½ mile of a nonmotorized facility
Roadway Operations	Hours of (recurring and non-recurring) congestion delay per 1,000 vehicle miles traveled

Define Representative Corridors

SEMCOG had limited resources and time to invest in the analysis. Understanding this, they estimated the MOE by selecting several representative freeway corridors within the region and expanding the results of these analyses to represent a region-wide MOE. These corridors each have operational characteristics such as average traffic volume, interchange density, directional flows and surrounding land use that are representative of many other corridors throughout the Detroit region. The representative corridors all are freeway/limited access roadways and

include an urban radial (Interstate 96), a suburban radial (Interstate 75), and a suburban beltway (Interstate 275). SEMCOG estimated the operations MOE on these “representative” corridors and expanded the results to the entire region.

Data was collected for the representative corridors including baseline peak period volumes, capacities, number of lanes, VMT and speeds (congested and posted). All of these data were obtained from the validated regional travel demand model. The representative urban radial corridor has 4 lanes, a capacity of 24,000 vehicles per hour, and a volume of 18,200 vehicles per hour; the suburban radial has 2 lanes, a capacity of 12,000 vehicles per hour, and a volume of 8,900 vehicles per hour; and the suburban beltway has 3 lanes, a capacity of 18,000 vehicles per hour, and a volume of 15,875 vehicles per hour. Table D-2 lists the details of each representative corridor.

Table D-2 Representative Corridor Details

Representative Corridor	Lanes	Capacity (Vehicles per Hour)	Volume per Hour
Urban Radial (I-96)	4	24,000	18,200
Suburban Radial (I-75)	2	12,000	8,900
Suburban Beltway (I-275)	3	18,000	15,875

Use Representative Corridors to Represent Region-Wide Analysis

SEMCOG developed a region-wide analysis by identifying the percent of regional VMT that each corridor accounts for. Based on professional judgment and historical traffic data, SEMCOG determined that urban radials carry 37 percent of regional VMT, suburban radials carry 30 percent of regional VMT, and suburban beltways carry 33 percent of regional VMT. Because they opted to use a rate-based MOE, SEMCOG was able to use the delay rate from the representative corridors as a proxy for delay on all other similar corridors in the region. Finally, the representative corridors were rolled up into a regionwide value by taking a VMT weighted average of total delay. Table D-3 shows the percent of regional VMT by representative corridor and provides an example calculation of the weighted average of total delay given illustrative delay of five, four, and three hours of total delay per 1,000 VMT for the urban radial, suburban radial, and suburban beltway corridors, respectively. While this method can be used to estimate the change in the rate of delay in the region under different funding scenarios for major corridors, it cannot be used to estimate total delay in the region, as travel on many additional minor corridors and arterials are not represented by the selected analysis corridors.

Table D-3 Representative Corridor Vehicle Miles Traveled

Representative Corridor	Percent of Regional Vehicle Miles Traveled (VMT)	Example MOE Result – Total Delay (hours/1,000 VMT)
Urban Radials	37%	5
Suburban Radials	30%	4
Suburban Beltways	33%	3
Regionwide	100%	$4.04 = 5 \times 0.30 + 3 \times 0.37 + 4 \times 0.33$

Develop Funding Scenarios

The analysis team applied professional judgment to simplify their regional analysis. Instead of a more rigorous approach requiring development of lists of specific projects and individual analysis of their cost, SEMCOG used experience with previous deployments of these types of strategies to make a high-level estimation of how much operations-type investments could be built given different funding levels. For example, they determined that \$50 million in funding would allow them to invest in roadway operations program covering 75 percent of the VMT on urban radials, 50 percent of VMT on suburban radials, and 50 percent of the VMT on suburban beltways. Note that as part of this process, they prioritized funding on urban radial corridors while funding suburban radials and suburban beltways at similar rates. Table D-4 shows how SEMCOG coverage of roadway operations projects on regional facilities under the different investment levels.

Table D-4 Regional Coverage of Roadway Operations Assumed for Various Investment Levels

Representative Corridor	Investment Level			
	\$25M	\$50M	\$75M	\$100M
Urban Radial	50%	75%	100%	100%
Suburban Radial	25%	50%	75%	100%
Suburban Beltway	25%	50%	75%	100%

Select Analysis Method

SEMCOG considered several optional approaches for conducting the reliability analysis:

- Development of a sketch planning methodology utilizing SHRP 2 L03 data poor equations; or
- Incorporation of post-processing methods with the existing travel demand model, such as the pairing of the travel demand model with the FHWA's ITS Deployment Analysis System (IDAS) software.

Weighing the analysis resources (time, money, and staff), the ease of the analysis method and the ready availability of data to support the analysis, and the need for high-level assessment of the investment levels, SEMCOG identified the sketch planning approach based on SHRP2 L03 methods as the preferred approach.

Collect Data

Data for this analysis included baseline peak period volumes, capacities, number of lanes, VMT and speeds (congested and posted). This data was obtained from SEMCOG's validated regional travel demand model on a link by link basis and summed/averaged across the representative corridors. Free flow and congested travel times were estimated by dividing the link lengths by the compiled travel speeds.

Estimate Baseline Delay on Representative Corridors

To support the case study, SHRP 2 L05 produced a spreadsheet that operationalizes the data poor equations from SHRP 2 L03. The spreadsheet requires users to input capacity, volume, and length of segment and uses IDAS lookup tables in conjunction with the SHRP 2 L03 data poor equations to produce several measures of reliability, including the mean TTI, 50th percentile TTI, 80th percentile TTI, and 95th percentile TTI/PTI. It also produces a measure of overall delay that includes non-recurring delay using the relationship of the economic value of average delay to non-recurring delay.

For this analysis, the peak period was defined as the peak three hours during the morning commute (6am to 9 am), consistent with the data available in the regional travel demand model. Recurring delay was estimated by subtracting free-flow travel times from congested travel times using Equation 7 from the Technical Reference:

$$\text{RecurringDelay} = t - (1/\text{FFS})$$

Then incident related delay was estimated using FHWA's ITS Deployment Analysis System (IDAS) lookup tables based on number of lanes, length of the peak period, and volume to capacity ratio. Table D-5 below shows an excerpt of the larger table, specific to the urban radial corridor. The incident related delay factors represent the expected amount of incident delay that would be incurred at different levels of congestion (as measured by the volume/capacity ratio) and the number of roadway lanes. The selected factor was applied on a link-by-link basis to the VMT on the facility to estimate the expected incident related delay.

Table D-5 IDAS Incident Related Delay Factors for a 3-hour Peak Period³

Volume/1-Hour Level of Service Capacity	Number of Lanes		
	2	3	4+
0.15	3.71E-08	1.62E-09	5.45E-12
0.3	5.66E-07	5.21E-08	7.22E-10
0.45	2.79E-06	3.97E-07	1.26E-08
0.6	8.63E-06	1.68E-06	9.57E-08
0.75	2.07E-05	5.14E-06	4.61E-07
0.9	4.25E-05	1.28E-05	1.67E-06
1.05	7.78E-05	2.77E-05	4.95E-06
1.2	0.000132	5.41E-05	1.27E-05
1.35	0.000209	9.77E-05	2.91E-05
1.5	0.000316	0.000166	6.12E-05
1.65	0.00046	0.000267	0.00012
1.8	0.00065	0.000413	0.000221
1.95	0.000901	0.00062	0.000389
2.1	0.001245	0.000912	0.000656
2.25	0.00177	0.00135	0.001074
2.4	0.002722	0.002115	0.001742
2.55	0.004772	0.003798	0.003011
2.7	0.009674	0.00828	0.006586
2.85	0.014859	0.012966	0.010231
3	0.01986	0.01744	0.01368

Incident related delay, however, does not account for the total non-recurring delay. To estimate the total delay, the algorithms for travel time equivalents (Equation 21) and total equivalent delay (Equation 22) were utilized from the SHRP2 L03 study that provided estimation techniques for situations where limited data is available regarding these additional causes of non-recurring congestion. Total equivalent delay for the region was then estimated by extrapolating the total delay by VMT factors to estimates of the regional VMT by representative corridor type. This resulted in an overall regional MOE of 6.8 hours of total delay per 1,000

³ IDAS Users Manual, 2004.

VMT. Thus, including reliability in this assessment increased the estimate of delay to more than double the measure when only recurring travel time was considered.

Table D-6 Baseline Recurring, Incident and Total Equivalent Delay by Representative Corridor and Regionwide

Representative Corridor	Percent of Regional VMT	Recurring Delay per 1,000 VMT (hours)	Incident Delay per 1,000 VMT (hours)	Total Equivalent Delay per 1,000 VMT (hours)
Urban Radial	37%	1.05	1.23	4.06
Suburban Radial	30%	4.04	1.00	8.48
Suburban Beltway	33%	2.56	2.46	8.36
Regional Total (VMT weighted average)		2.45	1.57	6.80

Select Strategies to Improve Reliability

After calculating the baseline total delay, the next step in the process was to estimate the impact on delay of investment in various roadway operations strategies. SEMCOG had completed previous work to develop a list of roadway operational strategies throughout the region. These strategies included freeway management (surveillance, monitoring, ramp metering); incident management including freeway service patrols; and traffic signal coordination.

Estimate Reliability Benefits

Factors representing the potential impact of these strategies were applied to the model analysis for the roadway corridors to represent the impact of the included strategies. SEMCOG assumed that the roadway operational investments would reduce the average incident duration by 20 percent, reduce the total number of incidents by 10 percent, and increase capacity by 5 percent compared to existing conditions. These values were based on SEMCOG's understanding of the specific operational characteristics of the representative roadway and their previous experience in deploying these strategies. These values are consistent with values used in previous analysis meant to estimate the impacts of these types of strategies in the regional travel demand model.

Table D-7 Proposed Corridor Reliability Strategies and Their Assumed Impact

Strategy	Assumed Impacts
Incident management and freeway service patrol (corridor wide)	Incident duration decreased by 20%
Ramp metering (corridor wide)	Crashes reduced by 10% Capacity increased by 5%

SEMCOG used Equation 9 from the Technical Reference to estimate the impact of these programs on non-recurring congestion.

$$Da = Du * (1-Rf) * (1-Rd)^2$$

Where:

Da = Adjusted delay (hours of delay per mile)

Du = Unadjusted (base) incident delay from the IDAS incident delay lookup tables (hours of delay per mile)

Rf = Reduction in incident frequency expressed as a fraction (with $Rf = 0$ meaning no reduction, and $Rf = .30$ meaning a 30 percent reduction in incident frequency)

Rd = Reduction in incident duration expressed as a fraction (with $Rd = 0$ meaning no reduction, and $Rd = .30$ meaning a 30 percent reduction in incident duration).

The incremental benefits for the representative corridors were extrapolated to the regional level by estimating the proportion of the regional network comprised of the representative corridors and applying the incremental benefits to regionwide estimates of total travel time, similar to the estimation of the baseline measure.

Develop Performance Curve


SEMCOG subtracted the savings from roadway operations improvements under different annual budgets from the baseline total delay (5.58 hours of total delay per 1,000 VMT) to show how different funding levels impact the MOE. Table D-8 shows how different levels of investment impact total delay.

Table D-8 Benefits of Roadway Operations Investments

Representative Corridor	Percent of Regional VMT	Savings in Total Delay per 1,000 VMT (hours)				
		\$0M	\$25M	\$50M	\$75M	\$100M
Urban Radial	37%	4.06	3.06	2.56	2.05	2.05
Suburban Radial	30%	8.48	7.12	5.77	4.41	3.06
Suburban Beltway	33%	8.36	7.62	6.87	6.12	5.37
Regional Total (VMT weighted average)		6.80	5.78	4.94	4.10	3.45

The result of this analysis was an improved performance curve better representing tradeoffs in investment levels in reliability mitigation strategies mapped to regional benefits in total travel time delay (including recurring and non-recurring travel time benefits). Figure D-2 shows the benefits of roadway operations investments (Table D-8) graphically.

Figure D-2 Investment Curve

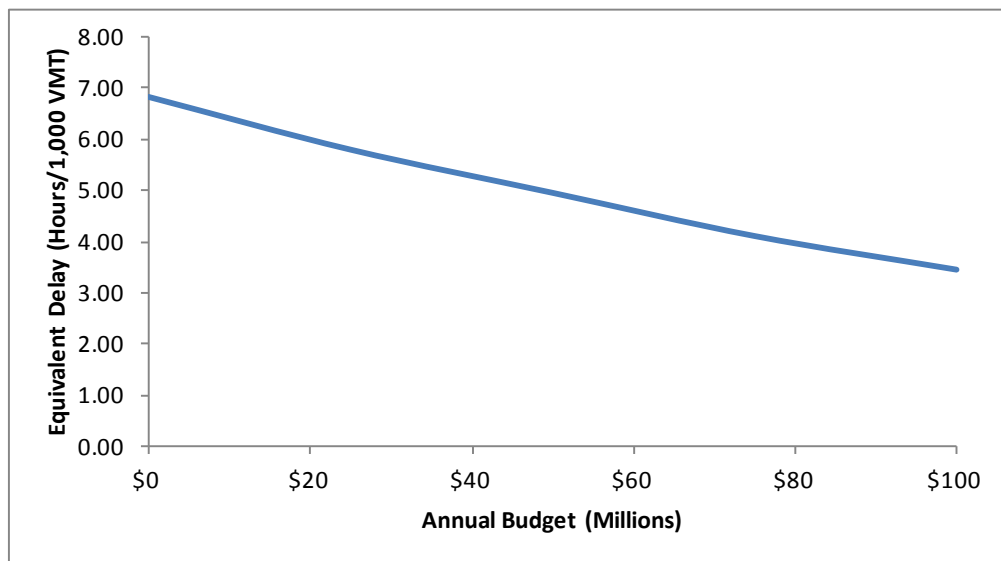

As SEMCOG invests more into roadway operations, total delay is reduced. The comparison of benefits estimated both with and without considering reliability show that investments in the operations strategies yield a much greater impact on total hours of delay, particularly at the lower investment levels. Small investments in these strategies result in a steep curve of reducing delay levels. Similar to the curve not considering reliability, there is a declining utility to higher investment levels and increased investment brings about lower incremental improvement for each dollar spent.

SEMCOG now can balance program level funding among pavement preservation, highway capacity, bridge preservation, safety, transit, non-motorized, *and* roadway operations.

D.4 CONCLUSIONS/LESSONS LEARNED

The comparison of the benefits estimated both with and without considering reliability shows several interesting results. Key findings include:

- As expected, when non-recurring delay is considered in the analysis, the overall delay estimates are much greater (with the baseline delay more than doubling from 2.4 to 6.8 hours of delay per 1,000 VMT).
- Investments in roadway operations strategies were shown to yield a much greater impact on total hours of delay, particularly at the lower investment levels. Small investments in these strategies result in a steep curve of reducing delay levels.

- Similar to the analysis, which does not considering reliability, there is a declining utility to higher investment levels and increased investment brings about lower incremental improvement for each dollar spent.

In addition to the actual analysis results, several lessons were learned throughout the case study:

- Reliability can be relatively easily incorporated in the tradeoff analysis process. Consideration of reliability will likely have an impact on the results of the prioritization process.
- The use of representative corridors can be effective in conducting a regional analysis within reasonable budget and schedule requirements.
- Even in situations with limited data availability, assessments of reliability can be performed efficiently, providing much needed consideration of these factors within the overall assessment of tradeoffs regarding investment priorities.

The analysis approach represented in this case study represents a first step in the overall incorporation of reliability performance measures in the investment prioritization process. Improvements and enhancements to this process may include:

- Application of non-recurring congestion measurement within the analysis of Highway Capacity improvements to make the comparison of capacity and operations improvements more equitable (e.g., capture the reliability benefits of increasing capacity).
- Inclusion of a greater variety of representative corridors in the analysis.
- Development of automated routines to allow the estimation of incident related delay and total delay (recurring and non-recurring) within the travel demand model itself, thus allowing the more detailed regional assessment of these measures.
- Separating the various roadway operations improvements within the analysis to allow each strategy to be analyzed individually.

E. Colorado DOT / Denver Regional Council of Governments

E.1 OBJECTIVE

This case study establishes baseline conditions for a pilot corridor and lays the groundwork for conducting a before/after analysis in order to assess benefits of operations strategies using an arterial performance monitoring system. It documents the steps to planning and funding an operations project intended to improve travel time reliability. Finally, the case study documents CDOT's efforts in selecting and incorporating operations (including reliability) performance measures into their long range planning process.

This case study provides validation for the following steps in the Reference Guide:

Measuring and Tracking Reliability; and

Incorporating Reliability Measures into Program and Project Investment Decisions.

E.2 BACKGROUND/PURPOSE

The Denver Regional Council of Governments (DRCOG), in partnership with the City of Englewood and Colorado DOT, recognized the need to start collecting mobility and travel time data on their arterial network to support their long range planning process. In a pilot effort, they implemented an inexpensive arterial performance monitoring system along a segment of Hampden Avenue, a major arterial in Denver. The Hampden Avenue project is approximately 7 miles long and includes 11 signalized intersections. The system consists of Bluetooth travel time detectors, queue length detectors, and volume counters installed at various locations throughout the corridor to monitor travel time and planning time indices. The system will be operational in spring 2013. The purpose of the pilot project is to provide operators with information that will help them to better manage their arterial roadways, and to provide travelers with better traveler information which will result in improved travel time reliability. Continuous monitoring of corridor performance will provide CDOT and decision-makers with quantifiable information on the reliability impacts of specific operations improvements that are implemented along the corridor, as well as an estimate of the total impact of all improvements made to the corridor or network.

The project partners plan to use the monitoring results to develop a portfolio of operations strategies that will be evaluated, selected, designed and implemented within a performance

based system. Potential operations strategies could include traffic management (e.g., signal retiming, ITS deployment, intersection improvements, geometric improvements, and roundabouts), incident management, pavement maintenance, bridge maintenance, transit, non-motorized facilities, freight/goods movement, winter operations, and capacity expansion projects. The system will demonstrate to decision-makers, taxpayers, and users that projects were selected to meet specific performance goals, were implemented as high priority projects based on performance criteria, and provide specific user benefits in terms of improving corridor and system reliability. Incremental improvement in benefits over time will allow the partner agencies to shift resources to operations investments.

E.3 MEASURING AND TRACKING RELIABILITY

The first part of the case study demonstrates the methodology for analyzing travel time data and calculating various reliability performance indices based on traffic flow data collected using the pilot arterial performance monitoring system. The results will be used to establish baseline conditions for the Hampden Avenue corridor, which is a critical first step in conducting a before/after analysis to assess the benefits of operations strategies.


Collect Baseline Travel Time Data

DRCOG, CDOT, and the City of Englewood staff met to develop a data collection plan to be implemented prior to the pilot project to provide baseline (“before”) travel time data. They decided that Bluetooth was the best technology for travel time reliability data collection for the “before” data. The ability to collect queue length, volume, and travel time data was considered when choosing the technology. The project partners worked to determine equipment location within the study corridor and develop an implementation plan for installation and integration of the equipment with CDOT systems. The “before” travel time data collection was conducted in spring 2012, with data being collected through the CTMS data archive.

The test location was a 2.3-mile section on Hampden Avenue between east of Federal Blvd and west of Sherman Street in Englewood, Colorado, a suburb of Denver. There are 2 to 3 lanes in each direction, and the lanes are separated by a median with numerous median openings on the test section. There were 3 miniature BlueToad Bluetooth devices (A, B, and C in Figure E-1) installed on the section. Travel time data were constructed by pairing vehicles that pass through the 3 locations.

In order to conduct the baseline test, CDOT used newly acquired Bluetooth reader detectors to collect the travel time before the permanent system was deployed. CDOT purchased these BlueToad units to be used as portable detectors for conducting short term studies around the state. This was the first use of the detectors, which was the reason there were some minor data collection problems (loss of data, batteries running out). CDOT has gained experience in the set up and use of the devices and they will continue to deploy these detectors for corridor studies and signal retiming studies.

Figure E-1 Test Section

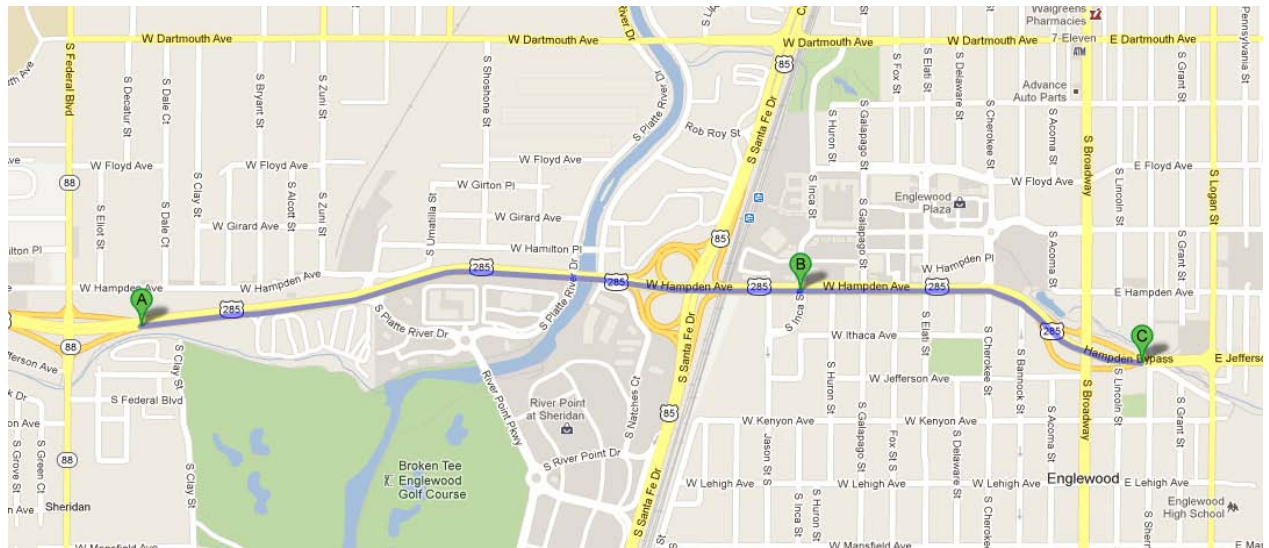

Data were collected from July 2 to September 3, 2012 and aggregated at 5-min intervals. There is a gap in the data due detector installation errors and set up issues. Table E-1 shows a sample of the collected travel times provided by the Bluetooth vendor, TrafficCast. One issue with the route travel time data is that if there is no matching pair during an observation interval, that observation interval will use the travel time from the previous interval. In this study, all the repeated observations were removed for further analysis.

Table E-1 Sample Data

Day of week	Date	Time	Last match time	Travel time
Monday	7/2/2012	11:30	7/2/2012 11:33	265.4
Monday	7/2/2012	11:35	7/2/2012 11:38	268.3
..
Monday	7/2/2012	21:55	7/2/2012 21:58	188.5
Monday	7/2/2012	22:00	7/2/2012 21:58	188.5

Estimate Baseline Reliability

In order to determine free flow speed, the travel times were plotted to show the differences between weekdays and weekends/holidays (see Figures E-2 and E-3). As such, the first step is to examine the travel times during the off peak hours on weekends, namely the 1:00 a.m. to 5:00 a.m. period during weekends. The resulting 15th percentile travel times are 177 seconds and 179

seconds for the eastbound and westbound traffic flow, respectively, which is close to 45 mph on both bounds. Therefore, 45 mph was chosen as the free flow speed.

Figure E-2 Travel Time Plot - Eastbound


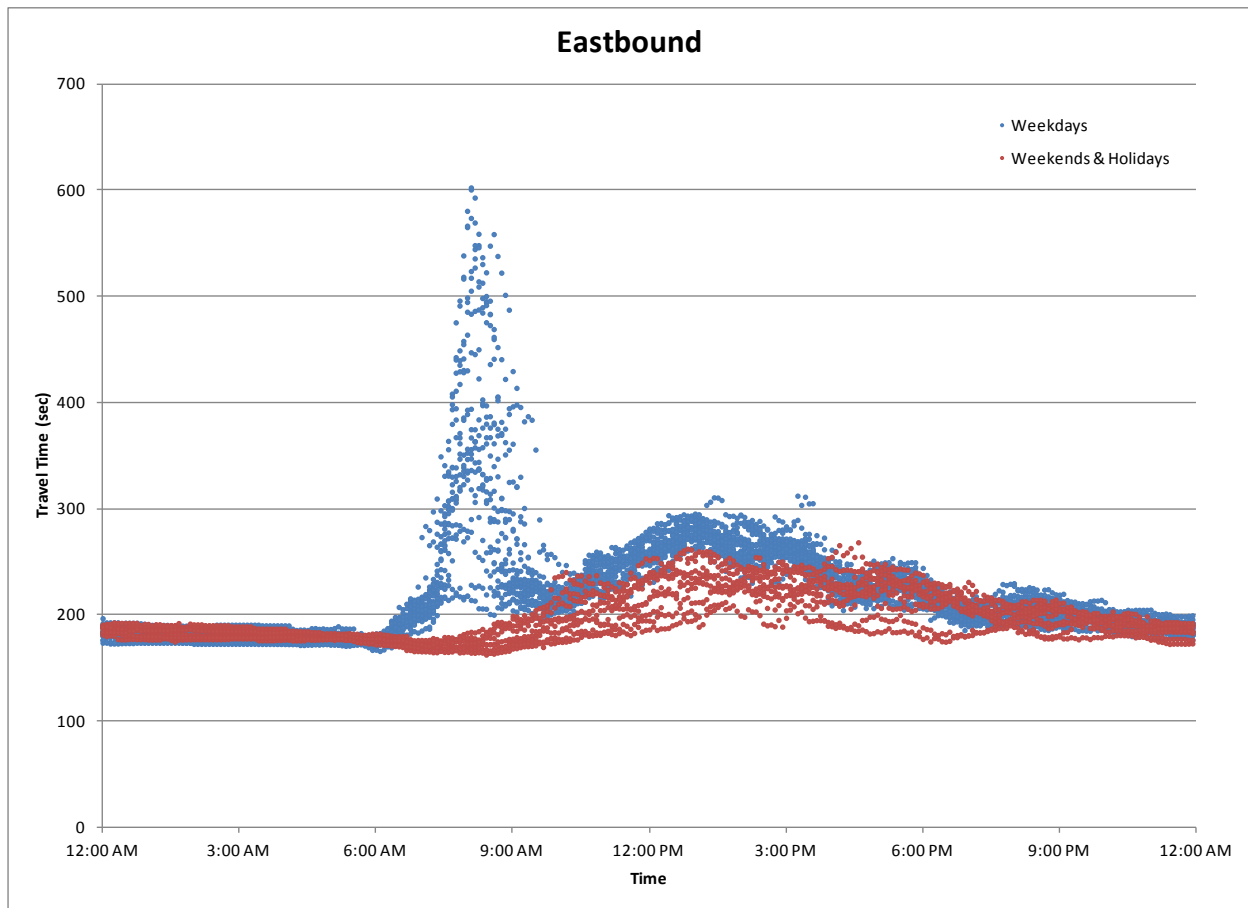


Figure E-3 Travel Time Plot - Westbound

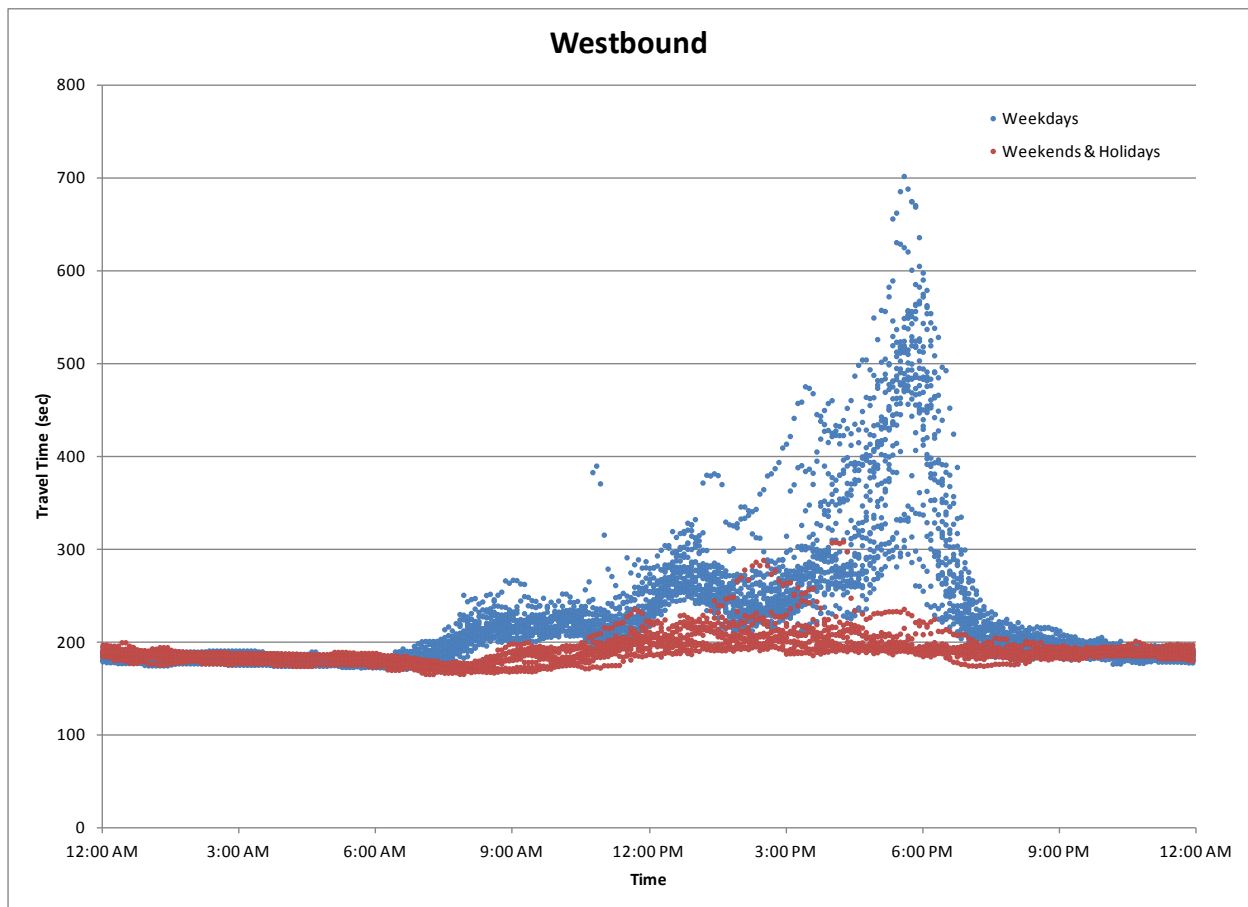

The travel time index, 80th percentile, and 95th percentile travel time (planning time index) calculations were performed using weekday data. Fixed time periods were defined as follows:


1. 12:00 a.m. to 6:00 a.m. – early morning
2. 6:00 a.m. to 9:00 a.m. – morning peak
3. 9:00 a.m. to 4:00 p.m. – mid-day
4. 4:00 p.m. to 7:00 p.m. – afternoon peak
5. 7:00 p.m. to 12:00 a.m. – late evening

The reliability results are summarized in Table E-2, while Figure E-4 shows the results graphically. Although reliability measurement typically requires one year of data, a smaller sample size was used to demonstrate the concept of calculating performance measures using Bluetooth data.

Table E-2 Performance Measure Results

Direction	Period	Length (miles)	Average Travel Time (second)	Average Speed (mph)	Travel Time Index (TTI)	80%tile Travel Time Index	95%tile Travel Time Index (Planning Time Index)
EB	early morning	2.3	180	46	1.00	1.00	1.03
EB	am peak	2.3	275	30	1.50	1.94	2.72
EB	mid-day	2.3	254	33	1.38	1.48	1.57
EB	pm peak	2.3	222	37	1.21	1.27	1.33
EB	late evening	2.3	201	41	1.09	1.13	1.17
WB	early morning	2.3	182	46	1.01	1.01	1.03
WB	am peak	2.3	199	42	1.09	1.17	1.25
WB	mid-day	2.3	251	33	1.37	1.49	1.77
WB	pm peak	2.3	374	22	2.03	2.61	3.02
WB	late evening	2.3	199	42	1.08	1.12	1.21

Figure E-4 TTI and PTI Plot

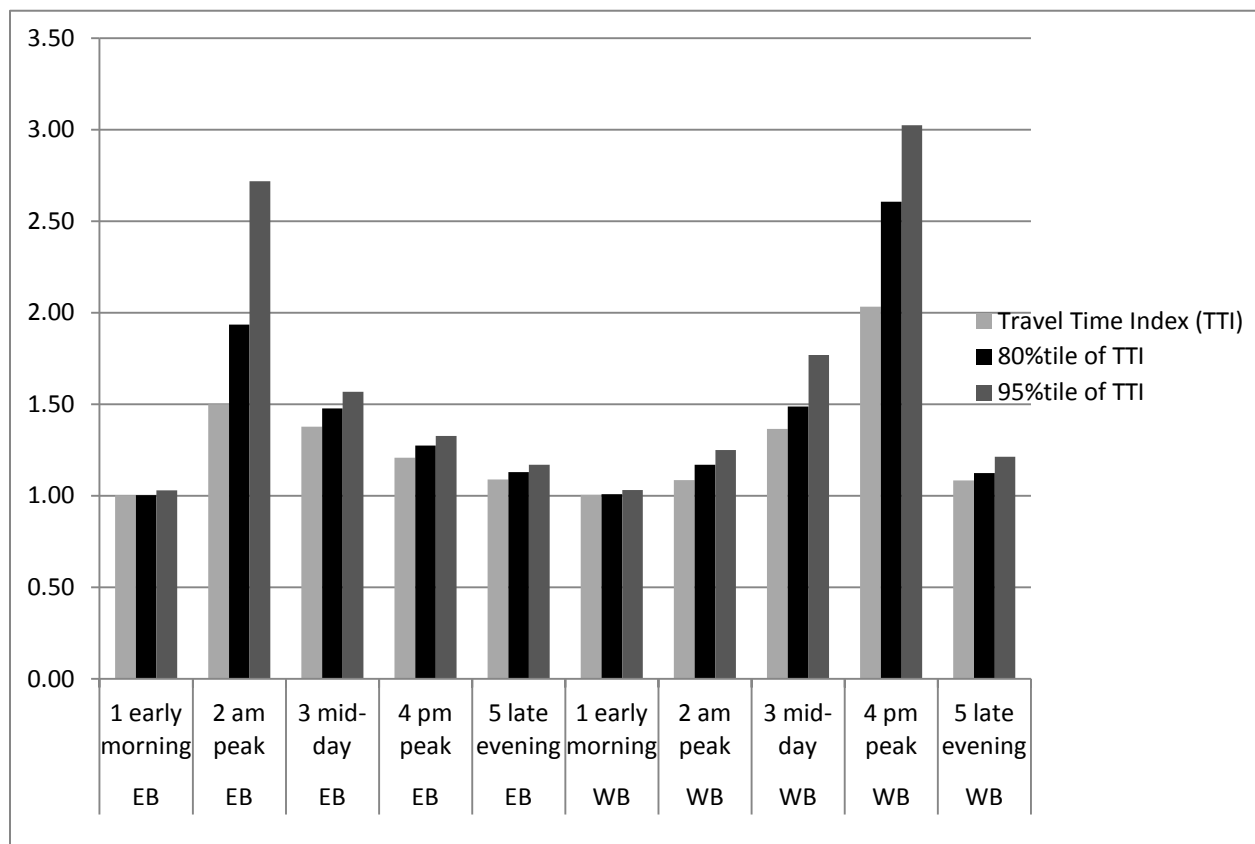

As seen in Figure E-4, the westbound PM Peak period is the most unreliable. It is also the most congested period, with an average travel time of almost 2 times the free flow travel time, and 2.6 times the free flow travel time at the 80th percentile.

Select Strategies and Estimate Reliability Benefits

The baseline travel time data from the system will be used to make adjustments to corridor signal timing in order to improve travel time reliability. Implementation of the improvement strategy will take place after the pilot system is operational in early 2013. Once the revised signal timing is in place, then the permanent system will collect data for several months to determine if the corridor provides more reliable travel times. The equipment installed for the pilot project system will be used to collect the “after” data. The benefits to users in travel time savings will be calculated along with air quality and fuel consumption benefits of the corridor improvements. Since the pilot system will not be available until 2013, the benefits were not reported as part of this case study.

E.4 INCORPORATING RELIABILITY MEASURES INTO PROGRAM AND PROJECT INVESTMENT DECISIONS

This section documents CDOT's efforts in selecting and incorporating operations (including reliability) performance measures into their long range planning process. This portion of the case study seeks to answer the following questions:

- How can CDOT develop a menu of operations performance strategies that best incorporate meaningful performance-based goals for system operations into long-term planning processes such as the long range plan and into short- to mid-term processes such as project selection and design as well as annual investment decisions?
- How can CDOT best communicate to its planning partners, public, and other transportation stakeholders sound performance-based decision making and progress made in the areas of system operations and mobility? Using a quantitative (e.g. benefit-cost analysis) approach, how can CDOT justify its system operations and mobility investment decisions to an audience of planning partners, legislature, and traveling public?

Organize Programs

Colorado DOT has made significant progress in producing and obtaining operations data for their freeway network through the CDOT ITS Program and by contracting with Navteq to obtain travel time data statewide. The pilot arterial performance monitoring system will provide operations data for a major arterial corridor in Denver. The CDOT headquarters staff realized that this data needed to be more organized and made available throughout the Department for a number of uses. This realization led the Department to create a new branch of Performance and Policy Analysis, as well as develop a Performance Data Business Plan in December 2011. The Performance Data Business identifies priority performance measures, addresses data management methodologies to support these measures, and details best practices and recommendations related to data governance, performance measures, and dashboard development.

Selecting Operations Measures

The CDOT Performance Data Business Plan recommended nine core performance measures. The measures and issues associated with them are described in the table below.

Table E.3 Selected CDOT Performance Measures

#	Measure	Tier	Issues	Recommendations
1	Number of Fatalities	2	Determine if measure should reflect a rate (fatalities per 100 million VMT) or a count Determine if measure should be reported for the entire state or for CDOT roadways Determine if measure should reflect an annual value or a 5-year average	Report a count rather than a rate Report measure for CDOT roadways Use a 5-year average
2	Bridge Condition	1	N/A	N/A
3	Pavement condition	2	Determine if the measure should include an IRI component	Combine remaining service life with IRI
4	Roadside Condition	2	Determine the preferred scope of this measure – the entire maintenance program, the Commission's priorities, or roadside condition	Focus measure on roadside conditions
5	Snow and Ice Control	1	N/A	N/A
6	Roadway Congestion	2	Add measures on delay and travel time reliability	TBD
7	On Time Construction	1	N/A	N/A
8	On Budget Construction	2	Determine if this measure should be considered as a priority measure and reported externally	Include measure in external reports
9	Strategic Action Item Implementation	2	Identify action items to monitor	Tie this measure to actions identified in CDOT's strategic plan and/or long range plan

Source: Cambridge Systematics, Inc. *CDOT Performance Data Business Plan*

The CDOT Performance and Policy Analysis branch has decided that two measures will be reported for roadway congestion: vehicle hours of delay (focused on congested urban areas and the I-70 corridor between Denver and Vail and on peak hours) and planning time index to show travel time reliability. In order to enable the calculation of planning time index, CDOT has entered into a five year contract to obtain Navteq historical travel time data on all state routes in Colorado.

Long Range Transportation Plan Development

CDOT has recently embarked on a two year project to update their Statewide Transportation Plan. The Plan itself will be a corridor based, data driven strategic plan focusing on goals and strategies. The Plan has a long range time horizon of 2040, and a mid-range time horizon of 2025. The Plan will not include projects, however, corridor based strategies will be identified and projects will be described that implement the selected strategies in the six year Statewide Transportation Improvement Program (STIP). The CDOT Planning branch has identified five goal areas for the Plan:

- Safety

- Mobility
- Infrastructure Sustainability
- Environmental Sustainability
- Economic Vitality

The specific goals will be developed over the next year. The goals will be consistent with guidelines from MAP-21. Funds will be allocated statewide by a dozen or so strategy areas that are to be determined in the plan development process. Example corridor strategies may include traffic management (sub strategies could be signal timing, ITS deployment, intersection improvements, geometric improvements, and roundabouts), incident management, pavement maintenance, bridge maintenance, transit, non-motorized facilities, freight/goods movement, winter operations, and capacity addition. CDOT has stated that little funding will be available for expanding (capacity addition) corridors; therefore the focus of the Plan will be on maximizing (improving corridor efficiency) and maintaining (system preservation).

CDOT has worked with Transportation Planning Regions (MPOs and rural boards of local officials) to identify 350 corridors statewide. A corridor may be a long rural section of a state highway or a short section that same state highway as it passes through a town. These corridors may be rolled up into corridor groups as the analysis is conducted. Each corridor will be evaluated and strategies appropriate to that corridor will be selected. An investment level will be assigned to each corridor (for example maintain, maximize, expand) and a portion of the statewide control total for that strategy will be assigned to the corridor.

Incorporating Operations Performance Measures into Program Funding Allocation, Project Selection and Design

CDOT took the recommendations from the Performance Data Business Plan and continued progress toward planning process enhancements that incorporate the selected performance measures, including reliability. There are several opportunities to incorporate operations performance measures into the Statewide Transportation Plan and in subsequent planning process steps of project selection in the STIP and the project design step.

In the Statewide Transportation Plan both the delay and the reliability measures will be used to determine which corridors are designated in the three investment level categories: 1) expand, 2) maximize, and 3) maintain. Thresholds can be determined for delay and for planning time index (or any selected reliability measure) that will indicate the whether the corridor deserves the highest investment level (expand), medium level (maximize), or lowest level (maintain). The delay and reliability measures along with the other performance measures listed in Table E-3 will also inform analysts evaluating the corridors what strategies are best suited for that corridor. In conducting the short term STIP process of selecting projects the delay and reliability measures will assist analysts in evaluating and prioritizing specific project

alternatives to be implemented. Finally, finer grain delay and reliability data can be used by designers to customize the project in a manner that achieves the best possible improvement.

Communicating Mobility and Systems Operations Performance to Transportation Stakeholders

As mobility and systems operations projects are implemented, it is important that the projects are evaluated, selected, designed and implemented within a performance system. The use of a performance based system shows decision-makers, taxpayers and users that the implemented project was selected to meet performance goals, was implemented as a high priority project based on performance criteria and provides specific user benefits. Continuous monitoring of corridor and network performance will provide decision-makers, taxpayers and users with quantifiable information on both specific projects and on the sum of all improvements made to the corridor or network. Communications of the corridor and system performance may be provided through an agency dashboard, web site graphics or agency marketing materials.

Justifying Mobility and Systems Operations Investments

Justifying investment decisions is another important part of a mobility and systems operations program. Accountability is a government wide emphasis in the United States today and providing project justification information on transportation investments is required to continue to receive funding allocations for operations and mobility projects. Justification based on project performance is the most definitive method of accountability. Reliability data, along with congestion and safety data, provides a quantifiable calculation of performance that indicates the benefits of projects to the users. These calculated benefits can also be associated with project (or program) costs to provide a benefit/cost ratio that enables easy comparison of operations projects with more traditional capacity addition projects.

E.5 CONCLUSIONS/LESSONS LEARNED

The first part of the case study demonstrates how CDOT was able to use limited resources to implement an inexpensive reliability monitoring system to support corridor-based, data driven planning efforts. The monitoring results will be used to evaluate signal timing strategies in the corridor, to report the results of the project after deployment and to communicate those benefits to decision-makers and the traveling public. This portable reliability monitoring system demonstrates that it is possible to use a small amount of equipment over a short time period to provide a snapshot of reliability in a corridor, which then is useful in evaluating strategies and providing benefits of improvements.

The second part of the case study demonstrates the use of reliability in the development of a statewide Long Range Transportation Plan (LRTP). The LRTP update process will demonstrate to decision-makers, taxpayers, and users that corridors were evaluated based on needs,

including congestion, and that projects were selected to meet specific performance goals, were implemented as high priority projects based on performance criteria, and provide specific user benefits in terms of improving corridor and system reliability. Incremental improvements in benefits over time will allow the partner agencies to shift resources to operations investments. The focus on maximizing corridor efficiency also allows CDOT to shift resources from capacity addition to operations improvements. DOTs and MPOs sometimes allocate funds to collect data as part of a planned update of their region's travel demand model; CDOT's use of Navteq data for assessing reliability indicates that it may be possible to use these funds to collect and process travel time data to support similar reliability monitoring efforts.

Conclusions

The pilot project on Hampden Avenue in Denver proved that reliability data can be calculated with a small amount of equipment (in this case three Bluetooth readers) over a relatively short period of time (two months). The use of this portable detection/monitoring system indicates to other agencies that corridor reliability studies and operations improvements benefits analysis can be conducted inexpensively.

CDOT is actively pursuing collection of reliability data. The purchase of Navteq data statewide and the portable detection/monitoring system have both proven to be valuable assets in obtaining reliability data. CDOT's experience in their LRTP update process indicates that reliability data can provide transportation agencies with opportunities to enhance several steps within the Statewide Transportation Plan development process, including:

Assessing program or strategy performance toward meeting Mobility goals and objectives;

Determining needs based investment levels for corridors;

Determining and evaluating the strategies that are best suited to improve travel in a corridor;

Selecting and prioritizing projects for inclusion in the STIP; and

Providing detailed data used in the design of specific projects.

CDOT modified their previous LRTP and STIP development processes to incorporate a process that is performance driven and needs based for this Plan update cycle. They determined that reliability was one of the most important factors in both evaluating system and project performance and assessing corridor needs. Developing plans based on performance data provides decision-makers, taxpayers and users with assurances that implemented projects will meet performance goals, will be a high priority based on performance and will provide users with specific benefits. Continuous monitoring of corridor and network performance will provide decision-makers, taxpayers and users with quantifiable information on both specific projects and on the sum of all improvements made to the corridor or network. Performance data, including reliability, provides accountability for investments to decision-makers, taxpayers and users. Performance data also enables calculations of specific benefits and

benefit/cost ratios that allow easy comparison with more traditional transportation improvements such capacity addition.

Lessons Learned

Bluetooth detectors proved to be troublesome for CDOT staff since this project was their first application, however persistence and diligence on the part of the CDOT staff eventually overcame the problems and useful data was provided for the reliability calculations.

Both the purchase of statewide Navteq data and the development of a portable monitoring/detection system have proven to provide CDOT with useful sources of travel time reliability data.

CDOT has modified their LRTP Update process and they have found that reliability data is useful in several LRTP/STIP process steps, including:

Assessing program or strategy performance toward meeting Mobility goals and objectives;

Determining needs based investment levels for corridors;

Determining and evaluating the strategies that are best suited to improve travel in a corridor;

Selecting and prioritizing projects for inclusion in the STIP; and

Providing detailed data used in the design of specific projects.

CDOT has found that reliability data is useful in communicating to decision makers and the traveling public network and strategy performance, system and program performance and project prioritization.

F. Washington State Department of Transportation

F.1 OBJECTIVE

The objective of this case study is to identify reliability deficiencies along a key segment of the Interstate 5 (I-5) corridor near the Joint Base Lewis McChord military base and apply sketch planning methods to assess the impacts of implementing a package of reliability mitigation strategies within the corridor.

The case study provides validation for the “Evaluating Reliability Needs and Deficiencies” and “Incorporating Reliability Measures into Program and Project Investment Decisions” steps in the Reference Guide.

F.2 BACKGROUND

WSDOT identified reliability deficiencies along a key segment of the Interstate 5 (I-5) corridor located in the southern area of the Seattle metropolitan area, adjacent to the Joint Base Lewis McChord military base. I-5 is the major north-south corridor in the State and carries high volumes of both passenger and freight movements. The active military base (Joint Army and Air Force) is located between Olympia and Tacoma and straddles I-5 for nearly 12 miles.

The corridor has a high degree of existing recurring congestion due to high demand and limited capacity; however, travel time reliability is often the more significant issue, negatively impacted by major incidents, construction/maintenance work zones, and primarily by large spikes in demand caused by major troop and equipment movements in and out of the military base.

Because of these corridor deficiencies, WSDOT wants to investigate corridor investments that will assist in mitigating the adverse reliability issues. WSDOT has successfully integrated a performance based planning process, but before this study had not evaluated reliability measures in the corridor. To aid in the development of a prioritization process for analyzing potential roadway enhancements, WSDOT wanted to gain a better understanding of the baseline levels of reliability in the corridor and estimate the impact of various capacity and operational strategies in mitigating the negative impacts of non-recurring congestion in the corridor. This case study was initiated to evaluate the baseline and potential future reliability of this key corridor.

F.3 EVALUATING RELIABILITY NEEDS AND DEFICIENCIES

Assess Data Sources

An approximate 15-mile segment of the I-5 corridor was highlighted for analysis in this study. This segment was bordered on the north by Highway 512 and on the south by the interchange at Marvin Road. This segment had several sources of information available to support the analysis of reliability, including:

- The corridor was completely covered by the regional travel demand model providing estimates of current and future volumes and average speeds;
- WSDOT had begun estimating and compiling travel times through the corridor based on observed speeds at several existing traffic surveillance stations (e.g., loop detectors and acoustic sensing); and
- A previously conducted interchange study had resulted in the development of a traffic simulation model that covered a portion of the northern half of the corridor.

Select a Reliability Performance Measure

Various potential reliability performance measures were assessed based on the available technical guidance and the need to maintain consistency with State performance measure guidelines. WSDOT selected the travel time index as their preferred measure of reliability performance based on their previous experimentation and familiarity with this measure. They have recently been investigating reliability measures in the State and were generally pleased with the ability to easily compute the TTI measure using readily available data and analysis techniques. Further, they felt that this measure could be comfortably be explained and communicated, and could be well understood by stakeholders. They also selected the 95th percentile travel time index to help flesh out their understanding of reliability issues in the corridor, since it could be estimated easily using similar methods and data.

Select Analysis Method

WSDOT considered several optional approaches for conducting the reliability analysis:

- Development of a sketch planning methodology utilizing SHRP 2 L03 data poor equations;
- Incorporation of post-processing methods with the existing travel demand model, such as the pairing of the travel demand model with the FHWA's ITS Deployment Analysis System (IDAS) software; and

- Further enhancement of the partial coverage simulation model to provide a robust ability to evaluate traffic performance under many multiple operating scenarios and assess the results.

WSDOT considered its available data and models (regional travel demand model, observed travel times, and simulation model output), analysis resources (time, money, and staff), and need for accuracy and confidence in the results of the analysis (a preliminary estimate of corridor reliability and provide an initial screening of the impacts of implementing various reliability mitigation measures), and determined that they would apply a sketch planning model to estimate reliability deficiencies in the corridor.

Define Corridor Subsections

The analysis corridor, I-5 corridor near Joint Base Lewis McChord military base, is approximately 15 miles in length, stretching between Olympia and Tacoma, WA. The corridor is bordered on the north by Highway 512 and on the south by the interchange at Marvin Road. To assess the performance of the corridor, WSDOT subdivided the full corridor into six homogeneous sub-corridor segments, with three in each direction. The resulting segments each carry approximately the average peak-period volume and have the same number of lanes.

Collect Data

The regional travel demand model was primarily used to obtain input data for the sub-segments, including number of lanes, peak period (3-hour) volume, free flow speed, congested speed, capacity, and vehicle miles traveled (VMT). Table F-1 shows additional input data that WSDOT used to estimate reliability deficiencies. Data include the length of the analysis period, number of lanes, facility capacity, facility volume, corridor length, total facility vehicle miles traveled, and free flow speed. The analysis year (2015) and length of the analysis period (three hours) were based on available data in the travel demand model. The average vehicle occupancy also was based on model parameters. The number of lanes, facility capacity, facility volume, and facility mean speed are outputs of the regional travel demand model.⁴ WSDOT determined the corridor length by defining corridor subsections (see the next step for a more detailed description). Total vehicle miles traveled are calculated from segment length and vehicles. Free flow speed is derived from the posted speed in the corridor and is reflected in the model.

⁴ The spreadsheet model can estimate facility mean speed using speed curves or can use mean speed directly from travel demand model outputs.

Table F-1 WSDOT Data Input File

Segment	Study Period	INPUT DATA					
		Segment Type	Number of Lanes	Free Flow Speed	Capacity	VMT	Peak Hour Volume
NB from 123 to 128	3	Freeway	4	60	8,400	37,500	7,500
NB from 119 to 123	3	Freeway	3	60	6,300	24,133	6,033
NB from 114 to 119	3	Freeway	3	60	6,300	33,800	5,633
SB from 114 to 119	3	Freeway	4	60	8,400	29,167	5,833
SB from 119 to 123	3	Freeway	3	60	6,300	22,533	5,633
SB from 123 to 128	3	Freeway	3	60	6,300	31,800	5,300

Estimate Baseline Travel Time Index

To support the case study, SHRP 2 L05 produced a spreadsheet that operationalizes the data poor equations from SHRP 2 L03. The spreadsheet requires users to input capacity, volume, and length of segment and uses IDAS lookup tables in conjunction with the SHRP 2 L03 data poor equations to produce several measures of reliability, including the mean TTI, 50th percentile TTI, 80th percentile TTI, and 95th percentile TTI/PTI. It also produces a measure of overall delay that includes non-recurring delay using the relationship of the economic value of average delay to non-recurring delay.

Equation 8 from the Technical Reference is reproduced below and shows how the mean TTI is calculated based on free flow speed, recurring delay, and incident delay. Recurring delay is measured as the difference between free flow travel time and actual travel time, multiplied by the volume. Incident delay is estimated using IDAS lookup tables based on number of lanes, length of the peak period, and volume to capacity ratio.

$$TTI_m = 1 + FFS * (RecurringDelay + IncidentDelay)$$

Where $RecurringDelay = (Total\ Facility\ VMT / Facility\ Mean\ Speed) - (Total\ Facility\ VMT / FFS)$

And *IncidentDelay* is estimated using an IDAS lookup table, as shown in Table F-2.

Baseline travel time index results for the corridor are shown in Table F-3. WSDOT rolled up the sub-segment level mean TTI performance measure into a corridor-wide measure by weighting sub-segment level mean TTI by VMT and averaging the weighted values of all six segments.

Table F-2 IDAS Incident Related Delay Factors

VC Ratio (= volume * duration / capacity)				
Duration		2 lane	3 lane	4 lane
1	0.05	3.43785E-08	1.43753E-09	4.39189E-12
	0.10	5.24004E-07	4.6321E-08	5.81987E-10
	0.15	2.57854E-06	3.5318E-07	1.01474E-08

VC Ratio (= volume * duration / capacity)				
Duration		2 lane	3 lane	4 lane
	0.20	7.98698E-06	1.49258E-06	7.71214E-08
	0.25	1.91973E-05	4.56518E-06	3.71869E-07
	0.30	3.93026E-05	1.13804E-05	1.34468E-06
	0.35	7.20315E-05	2.46354E-05	3.98651E-06
	0.40	0.00012174	4.80949E-05	1.02196E-05
	0.45	0.000193407	8.67709E-05	2.34456E-05
	0.50	0.000292645	0.000147104	4.92778E-05
	0.55	0.000425774	0.000237155	9.64873E-05
	0.60	0.000600152	0.000366848	0.000178189
	0.65	0.000825397	0.000548468	0.000313301
	0.70	0.00111746	0.000798277	0.000528343
	0.75	0.00151086	0.00114237	0.000859888
	0.80	0.00209288	0.00163738	0.00135971
	0.85	0.0030921	0.00243847	0.00211483
	0.90	0.00509498	0.00400772	0.00334827
	0.95	0.00954712	0.00771197	0.00592218
	1.00	0.019859999	0.017440001	0.01368

Table F-3 Baseline Travel Time Index Results by Sub-Corridor and Corridor-Wide

Corridor Segment (Direction)	Recurring Delay (hours)	Incident Delay (hours)	Mean TTI	95 th Percentile TTI
Segment 1 (NB)	518.62	621.62	1.61	2.74
Segment 2 (NB)	333.76	1005.28	2.11	3.74
Segment 3 (NB)	187.78	710.76	1.53	2.56
Segment 1 (SB)	403.37	56.62	1.32	2.01
Segment 2 (SB)	311.63	473.84	1.70	2.94
Segment 3 (SB)	176.67	360.38	1.34	2.07
Corridor Total	1931.83	3228.5	1.58	2.63

Note: The corridor total for Mean TTI and the 95th Percentile TTI is estimated by taking the VMT weighted average of each segment value.

Set Reliability Thresholds

WSDOT understood that there were major reliability deficiencies in this corridor and the analysis helped them to identify where they were. Further, SHRP 2 L05 used professional judgment and understanding of the issues in the corridor to set an initial threshold that would help WSDOT structure an analysis of reliability deficiencies. Based on their emerging use and knowledge gained to date of reliability performance measures in the State, they identified a mean TTI threshold of 1.5 as representing a corridor that could be considered 'unreliable.'

Identify Reliability Deficiencies

Based on the reliability threshold, the baseline results indicate that every northbound segment and southbound segment 2 are 'unreliable' and need improvement. In addition, the corridor as a whole is unreliable. Table F-4 identifies unreliable segments.

Table F-4 Baseline Travel Time Index Results by Sub-Corridor and Corridor-Wide

Corridor Segment (Direction)	Mean TTI	Reliable?
Segment 1 (NB)	1.61	Unreliable
Segment 2 (NB)	2.11	Unreliable
Segment 3 (NB)	1.53	Unreliable
Segment 1 (SB)	1.32	Reliable
Segment 2 (SB)	1.70	Unreliable
Segment 3 (SB)	1.34	Reliable
Corridor Total	1.58	Unreliable

F.4 INCORPORATING RELIABILITY MEASURES INTO PROGRAM AND PROJECT INVESTMENT DECISIONS

Select Strategies to Improve Reliability

WSDOT had completed previous work to develop a list of operations and capital strategies to improve corridor reliability. These investments include:

- Incident management and freeway service patrol (corridor wide);
- Ramp metering (corridor wide);
- Traveler information dynamic message signs (selected upstream locations);
- Auxiliary lanes (selected locations);
- Traffic surveillance cameras (corridor wide); and
- Enhanced traffic detection (corridor wide).

Estimate Reliability Benefits and Needs

Next, potential impacts of the combined strategies were identified by reviewing factors developed both as part of the SHRP2 L07 project and the IDAS tool default assumptions. WSDOT adjusted these assumptions based on their understanding of the corridor and how the strategies were intended to be operated, as well as their own experience with these strategies in other parts of the State. Table F-5 shows the various strategies and their assumed impact.

Table F-5 Proposed Corridor Reliability Strategies and Their Assumed Impact

Strategy	Assumed Impacts
Incident management and freeway service patrol (corridor wide)	Incident duration decreased by 25%
Ramp metering (corridor wide)	Freeway capacity increased by 10% Crashes reduced by 10%
Traveler information dynamic message signs (selected upstream locations)	Volume reduced by 3% (due to diversion)
Auxiliary lanes (selected locations)	Freeway capacity increased (dependent on configuration of lane) Crashes reduced by 5%
Traffic surveillance cameras (corridor wide), and Enhanced traffic detection (corridor wide).	No inherent impacts of deployment by themselves; however, these strategies support the other strategies and contribute to their impact.

WSDOT used Equation 9 from the Technical Reference to estimate the impact of reduced incident duration and reduced crashes. Decreases in volume and increase in capacity were used to estimate benefits directly.

$$Da = Du * (1-Rf) * (1-Rd)^2$$

Where:

Da = Adjusted delay (hours of delay per mile)

Du = Unadjusted (base) incident delay from the IDAS incident delay lookup tables (hours of delay per mile)

Rf = Reduction in incident frequency expressed as a fraction (with $Rf = 0$ meaning no reduction, and $Rf = .30$ meaning a 30 percent reduction in incident frequency)

Rd = Reduction in incident duration expressed as a fraction (with $Rd = 0$ meaning no reduction, and $Rd = .30$ meaning a 30 percent reduction in incident duration).

Table F-6 shows how the improvements reduce recurring and incident delay while improving mean TTI to below the thresholds for all segments. Corridor-wide, the average travel time is only 15 percent longer than the free flow travel time and is considered reliable.

Table F-6 Reliability Benefits of Proposed Improvements

Corridor Segment (Direction)	Recurring Delay (hours)	Incident Delay (hours)	Mean TTI	95 th Percentile TTI
Segment 1 (NB)	165.34	339.2	1.28	1.90
Segment 2 (NB)	130.05	548.5	1.58	2.68
Segment 3 (NB)	117.09	387.8	1.31	1.99
Segment 1 (SB)	217.63	30.9	1.18	1.59
Segment 2 (SB)	99.35	258.5	1.33	2.04
Segment 3 (SB)	110.16	196.6	1.20	1.67
Corridor Total	839.62	1761.5	1.30	1.95

The proposed array of investments eliminates the reliability deficiencies in the corridor. As such, these investments can be considered ‘needs’ in this corridor. The analysis showed that a relatively low-cost set of improvements, relative to major capacity enhancements in the corridor, could improve travel time reliability in the corridor. These enhancements included incident management, ramp metering, auxiliary lanes, traffic surveillance and traveler information strategies. The travel time index for the corridor with the combination of improvements deployed was estimated at 1.30. This represents a nearly 20 percent reduction in the index and a significant improvement in reliability.

F.5 CONCLUSIONS/LESSONS LEARNED

The case study was successful in demonstrating how agencies can use sketch planning methods to assess the reliability impacts for a package of operations strategies within a corridor and then advance these projects into the region’s long range transportation plan. The case study demonstrated:

- The process for collecting data and selecting appropriate analytical techniques from among several available options.
- How to divide the entire corridor into subsections. This allowed the analysis to be completed in a timely and resource conscious manner without washing out the differences in performance that would have likely occurred if the corridor was treated as a whole.
- How to identify reliability deficiencies in a corridor using reliability thresholds.
- How a relatively low-cost set of operations investments can improve travel time reliability in a corridor.

- How agencies can apply sketch planning methods using travel demand model data and the SHRP 2 L03 “data poor” reliability prediction equations within a spreadsheet environment.

Lessons learned include the following:

- Although not performed in this analysis, the approach could be easily modified to evaluate the likely reliability impact of individual strategies or different combinations of strategies, as opposed to the entire concert of all proposed enhancements.
- If the analysis were to be conducted on a larger scale, involving a much greater number of individual links, it may be useful to integrate some of the analysis processes (e.g., the lookup and application of incident related delay factors) directly within the travel demand model routine to streamline the process and minimize the exchange of data.